


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH



Locate well correctly on above
Section Plat

Graham County. Sec. 4 Twp. 10S Rge. 23W (E) (W)
Location as "NE/CNW/SW" or footage from lines. NW NE SE
Lease Owner Bankoff & Leben
Lease Name Rice Estate Well No. 1
Office Address Box 486, Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 5-30-67 19
Application for plugging filed 5-30-67 19
Application for plugging approved 5-30-67 19
Plugging commenced 5-30-67 19
Plugging completed 5-30-67 19
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well W. L. Nichols
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3780 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	203'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plug set @ 540' with 20 sks. cement
Plug set @ 210' with 20 sks. cement
Plug set w/ 1/2 sk. bulls & 10 sks. cement @ 40'


RECEIVED
STATE CORPORATION COMMISSION
JUN 2 1967
06-02-1967
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Lebens Drilling, Inc.
Address Box 486, Great Bend, Kansas 67530

STATE OF KANSAS, COUNTY OF BARTON, ss.
Leslie Kite (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leslie Kite
Box 486, Great Bend, Kansas 67530
(Address)

Subscribed and sworn to before me this 31st day of May, 1967

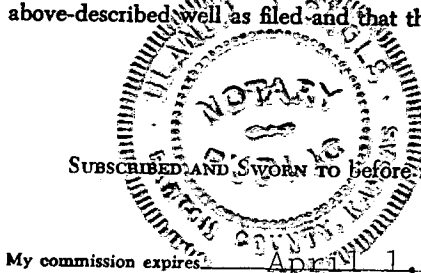

Ulanda Nichols
Ulanda Nichols Notary Public.

My commission expires April 1, 1971

15-065-20047-00-00

DRILLER'S LOG

COMPANY: Bankoff & Leben
 CONTRACTOR: LEBEN DRILLING, INC.
 FARM: RICE ESTATE #1
 LOCATION: NW NE SE SECTION 4-10S-23W
 GRAHAM COUNTY, KANSAS
 COMMENCED: 5-25-67
 COMPLETED: 5-30-67

0	1215	Shale, Sand
1215	1930	Shale, Sand, Shells
1930	2035	Redbed
2035	2071	Anhydrite
2071	2575	Shale, Shells
2575	3217	Shale, Lime
3217	3580	Lime, Shale
3580	3655	Lime
3655	3775	Lime, Shale
3775	3780	Lime
	<u>3780</u>	<u>RTD - D. & A.</u>

RECEIVED
 STATE CONSERVATION COMMISSION
 JUN 2 1967
 06-02-1967
 CONSERVATION DIVISION
 Topeka, Kansas

8 5/8" 8 rd. 20# new surface casing set @ 203' cemented with 165 sacks Common, 2% cc

I, Leslie Kite, do hereby certify that the above and foregoing is a true and correct copy of the log of the Rice Estate #1, located NW NE SE of Section 4, Township 10 South, Range 23 West, Graham County, Kansas, as reflected by the records of Leben Drilling, Inc.

Leslie Kite

Leslie Kite

STATE OF KANSAS)
) SS
 COUNTY OF BARTON)

Subscribed and sworn to and before me, a Notary Public, in and for Barton County, Kansas, this 31st day of May, 1967.



Ulanda Nichols

Ulanda Nichols

My Commission Expires:
 April 1, 1971