

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-129-21040-00-00  
Spot: SWNENE Sec/Twnshp/Rge: 4-32S-39W  
4290 feet from S Section Line, 990 feet from E Section Line  
Lease Name: DUNIGAN A Well #: 3  
County: MORTON Total Vertical Depth: 6000 feet

Operator License No.: 5447  
Op Name: OXY USA INC.  
Address: 5 E GREENWAY PLZ PO BOX 27570  
HOUSTON, TX 77227

String	Size	Depth (ft)	Pulled (ft)	Comments
COND	20	40		WITH 3.5 YDS CMT
PROD	5.5	5996	0	WITH 1105 SX CMT <u>195.00</u>
SURF	8.625	1724		WITH 640 SX CMT

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 09/23/2008 9:00 AM  
Plug Co. License No.: 31151 Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.  
Proposal Rcvd. from: DON HORTON Company: SARGENT AND HORTON PLUGGIN Phone: (580) 854-6515

Proposed Plugging Method: PUMP 200# HULLS & 25 SX CMT ON BOTTOM. MUD SPACER, 25 SX CMT @ 1800'. MUD SPACER 25 SX CMT AT 600'. 5 SX CMT AT 30'. CHECK BACKSIDE.

Plugging Proposal Received By: KEN JEHLIK WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 09/23/2008 1:00 PM KCC Agent: JACK MACLASKEY

Actual Plugging Report:

PUMP 250@ HULLS & 25 SX CMT AT 5845'. 1ST PLUG AT 1800' WITH 25 SX CMT. 2ND PLUG AT 600' WITH 25 SX CMT. 3RD PLUG AT 40' WITH 8 SX CMT. PUMP 13 SX CMT DOWN 5 1/2" X 8 5/8" ANNULUS.

Perfs:

Top	Bot	Thru	Comments
5858	5865		
5845	5851		


**INVOICED**  
DATE 10/30/08  
INV. NO. 2009060653

RECEIVED  
KANSAS CORPORATION COMMISSION  
**OCT 15 2008**  
CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED COMMON CEMENT BY SARGENTS.

Plugged through: TBG

District: 01

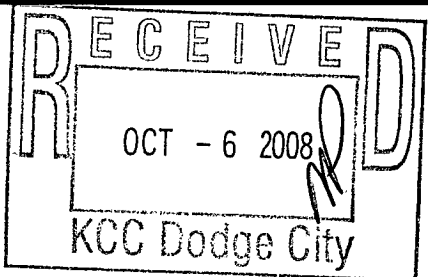

Signed

Jack MacLaskey  
(TECHNICIAN)