


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

Sheridan County, Sec 30 Twp 10 Rge. 28 (E) (W)

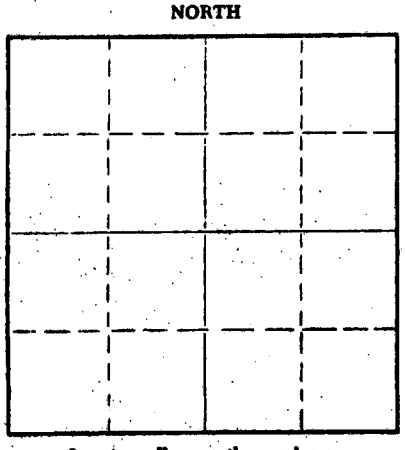

Locate well correctly on above  
Section Flat

Location as "NE/CNWSW" or footage from lines NE NW NW  
Lease Owner Helberg Oil Company  
Lease Name Chapman Well No. #1  
Office Address Box 32 Morland, Kansas 67650  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 1-5 19 82  
Application for plugging filed 1-5 19 82  
Application for plugging approved 1-5 19 82  
Plugging commenced 1-5 19 82  
Plugging completed 1-5 19 82  
Reason for abandonment of well or producing formation  
Dry Hole

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Carl Goodrow  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4200 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface		0	209'	8 5/8"	209'	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

1st. Plug set at 1350' with 70 sacks common cement 4%Gel 3% CALCL 50-50Poz  
Run Plug to 185' fill to surface with 40 sacks common cement 4%Gel 3%Cal Cl 50-50Poz  
10 sacks in rathole  
Heavy drilling mud between each plug.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sun Oilwell Cementing  
Address Oakley, Kansas

STATE OF Kansas COUNTY OF Graham ss.  
Jerry M. Helberg (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) Jerry M. Helberg  
Box 32 Morland, Kansas 67650  
(Address)

SUBSCRIBED AND SWORN to before me this 17 day of February, 19 82

My commission expires Dec. 4, 1983

RECEIVED  
STATE CORPORATION COMMISSION

Notary Public.



FEB 18 1982  
CONSERVATION DIVISION  
Wichita Kansas

DRILLERS LOG

CHAPMAN #1

CASING RECORD:

8 5/8" set at 209'

TOTAL DEPTH:

4200'

DESCRIPTION:

NE1/4 NW

Sec. 30, Twp.10, Rge.28.

OPERATOR: Helberg Oil Company

CONTRACTOR: Helberg Oil Company

COMMENCED: December 15, 1981

COMPLETED: January 5, 1982

FORMATION	FROM	TO	REMARKS
Sand & Shale	0	130	
Sand & Shale	130	225	
Shale	225	780	
Shale	780	1327	
Shale	1327	1800	
Shale	1800	2200	
Shale	2200	2317	
Shale	2317	2425	
Anhydrite Top	2341		
Shale	2425	2608	
Lime & Shale	2608	2767	
Lime & Shale	2767	2862	
Lime & Shale	2862	2994	
Lime & Shale	2994	3135	
Lime & Shale	3135	3255	
Lime & Shale	3255	3374	
Lime & Shale	3374	3450	
Lime & Shale	3450	3540	
Lime & Shale	3540	3645	
Lime	3645	3739	
Lime	3739	3822	
Lime	3822	3914	
Lime	3914	3970	
Lime	3970	4034	
Lime	4034	4050	
Lime	4050	4062	
Lime	4062	4105	
Lime	4105	4120	
Lime	4120	4175	
Lime	4175	4200	
T.D.	4200		D&A

I certify that the above is a true and correct copy of the log to the best of my knowledge.

**RECEIVED**  
STATE CONSERVATION DIVISION

**FEB 18 1982**

CONSERVATION DIVISION  
Wichita, Kansas

Helberg Oil Company

Jerry M. Helberg

Subscribed and sworn to before me this 17 day of February, 1982.

*James Richman*  
Notary Public



My commission expires Dec 4, 1983