

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Sheridan

County, Sec. 27

Twp. 10

Rge. 26

(E) (W)

Location as "NE/CNW/SW" or footage from lines

NW/4 NW/4 SW/4

Lease Owner Aurora Gasoline Co.

Lease Name Custer

Well No. 1

Office Address 701 Union Nat'l Bank Bldg. Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed May 20 1955

Application for plugging filed May 20 1955

Application for plugging approved May 20 1955


Plugging commenced May 20 1955

Plugging completed May 20 1955

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

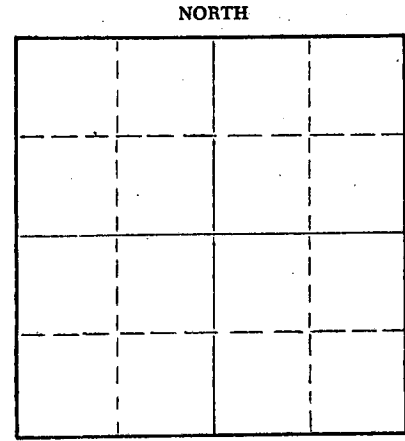

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Hays, Kansas

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4647 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	259' cemented w/160 sacks cement	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Bottom plug at 240' w/1 sack hulls, 15 sacks cement; filled with heavy mud to 40'; set plug with 1/2 sack hulls, 10 sacks cement; cement to cellar.

RECORDED
STATE CORPORATION COMMISSION

JUN 7 1955
6-3-55
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Veeder Supply & Development Co.

Address P. O. Box 201, Cherryvale, Kansas

STATE OF Kansas, COUNTY OF Montgomery, ss.

Emmett C. Veeder

(employee or owner or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Emmett C. Veeder

Cherryvale, Kansas

(Address)

SUBSCRIBED AND SWORN to before me this 23rd day of May, 1955

Oliver Lawson

Notary Public.

My commission expires July 11, 1956

PLUGGING
FILE SEC 27 T 10 R 26W
BOOK PAGE 122 LINE 28

Veeder Supply & Dev'l. Co.



Cherryvale, Kansas

& Dev'l. Co.

Drilled for Aurora Gasoline Co.-Veeder Supply Farm Custer No. 1 Depth 4647'

Contractor Veeder Supply & Development Co. Pipe 259' 8 5/8" csg. cemented w/160sacks

Location NW/4 NW/4 SW/4 Sec. 27 Twp. 10 Range 26

Commenced 5-6-1955 Completed 5-20-1955 County Sheridan State Kansas

KB: 2533

Sand, Gravel, shale	0	110	110
Shale and gravel	110	140	30
Shale	140	248	108
Gray shale	248	500	252
Blue shale	500	590	90
Shale and shells	590	1300	710
Shale, shells, phyrrite	1300	1520	220
Shale, red bed, sand	1520	1900	380
Shale, shells, red bed	1900	2173	273
Anhydrite	2173	2215	42
Shale and shells	2215	2950	735
Shale and lime streaks	2950	3205	255
Shale and lime	3205	3770	565
Lime	3770	4135	365
Shale and lime	4135	4405	270
Lime, shale, chert	4405	4431	26
Lime and shale	4431	4590	159
Lime	4590	4647	57
Total Depth		4647	

AFFIDAVIT

STATE OF KANSAS)
Montgomery County) SS

Emmett C. Veeder, of lawful age, being first duly sworn on oath, deposes and says:

That he is a resident of Cherryvale, Montgomery County, Kansas; that he knows and hereby on oath states that the above and foregoing drilling log covering the Custer #1 well location in Section 27-10-26, Sheridan County, Kansas, is true and correct. Further affiant saith not.


THE VEEDER SUPPLY AND DEVELOPMENT CO.

By: Emmett C. Veeder
Emmett C. Veeder

Subscribed and sworn to before me this 23rd day of May, 1955.

Les Lawson
Notary Public

My commission expires July 11, 1956.



PLUGGING
FILE SEC 27 T 10 R 26W
BOOK PAGE 122 LINE 28