


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

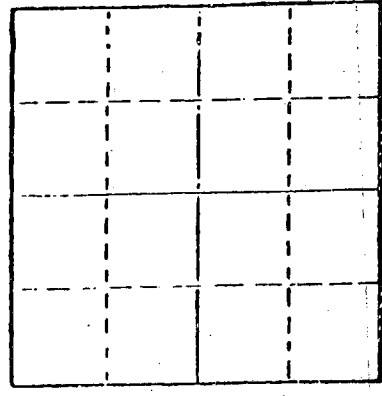

Locate well correctly on above
Section Plot

Sheridan County. Sec. 25 Twp. 10S Rge. 26 N/W
Location as "NE/CNW SW" or footage from lines
SE SE NW

Lease Owner J. A. Allison
Lease Name Von Lintel Well No. 1

Office Address 300 W. Douglas, Suite 305, Wichita, Ks
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole

Date Well completed June 30, 1978
Application for plugging filed (verbally) June 30, 1978
Application for plugging approved (verbally) June 30, 1978
Plugging commenced June 30, 1978
Plugging completed June 30, 1978

Reason for abandonment of well or producing formation
No commercial quantity of oil or gas encountered
If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4090'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold.- If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

Set 1st plug at 1050' with 70 sacks
2nd plug at 200' with 20 sacks
40' solid bridge with 10 sacks
2 sacks in rathole
Cemented with 50/50 posmix, 6% gel

RECEIVED
STATE CORPORATION COMMISSION
7-10-78
JUL 10 1978
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Abercrombie Drilling, Inc.

STATE OF KANSAS COUNTY OF SEDGWICK, ss.
Jack L. Partridge, Ass't. Sec.-Treas. (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) Jack L. Partridge
801 Union Center, Wichita, Kansas 67202
(Address)

My commission expires July 21, 1979
Sandra Richman
Sandra Richman Notary Public.



OPERATOR: J. A. Allison
 CONTRACTOR: Abercrombie Drilling, Inc.
 WELL NAME: Von Lintel #1
 LOCATION: SE SE NW Section 25-10S-26W
 Sheridan County, Kansas
 SPUD DATE: June 23, 1978
 COMPLETION DATE: June 30, 1978

0	80	Surface clay & shale
80	231	Shale
231	2083	Sand & shale
2083	2189	Shale
2189	2223	Anhydrite
2223	2434	Shale
2434	2715	Shale & lime
2715	2842	Shale
2842	3786	Shale & lime
3786	3880	Lime & shale
3880	3911	Lime
3911	3965	Lime & shale
3965	4090	Lime
	4090	Rotary Total Depth

Drilled 73' of 12 1/4" hole June 23, 1978. Lost circulation. Ran 225 sacks common cement, 2% gel, 3% CaCl. Cemented with 75 additional sacks of common cement to plug off lost circ. zone. Drilled 231' of 12 1/4" hole. Ran 6 joints of 8-5/8" surface casing. Set at 230' K.B. with 200 sacks common cement, 3% CaCl, 2% gel. Plug was down at 7:00 p.m., June 23, 1978. Cement did circulate.

T.D. 4090'. Set first plug at 1050' with 70 sacks, second plug at 200' with 20 sacks, 40' solid bridge with 10 sacks and 2 sacks in rathole. Cemented with 50/50 posmix, 6% gel. Plug was down at 7:00 a.m., June 30, 1978. State Plugger - Gilbert Balthazor.

SAMPLE TOPS:

Anhydrite 2190'
 B/Anhydrite 2223'

RECEIVED
 STATE CONSERVATION COMMISSION
 JUL 10 1978
 CONSERVATION DIVISION
 Wichita, Kansas

STATE OF KANSAS)
) ss
 COUNTY OF SEDGWICK)


Jack L. Partridge, Assistant Secretary-Treasurer of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the Von Lintel #1, SE SE NW Section 25-10S-26W, Sheridan County, Kansas.

ABERCROMBIE DRILLING, INC.

BY Jack L. Partridge
 Jack L. Partridge,
 Assistant Secretary-Treasurer

Subscribed and sworn to before me, a Notary Public, in and for the county and state aforesaid, as of this 7th day of July, 1978.

Sandra Richman
 Sandra Richman, Notary Public



My commission expires July 21, 1979.