

# WELL PLUGGING RECORD

## FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging off formations.

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

Sheridan County. Sec. 3 Twp. 10S Rge. 27 (E) W (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. 430' N of S. Line & 330' W of E

Lease Owner. Stanolind Oil and Gas Company

Lease Name. C. D. Wiman Well No. 1

Office Address. Box 591, Tulsa, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed. November 10 19. 46

27 Application for plugging filed. November 13 19. 46

W Application for plugging approved. Verbal Nov. 12-Written Nov. 15 19. 46

Plugging commenced. November 13 19. 46

Plugging completed. November 14 19. 46

Reason for abandonment of well or producing formation. Non-commercial well

Dry Hole Completion

If a producing well is abandoned, date of last production. 19.

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well. H. W. Kerr

Producing formation. Arbuckle Depth to top. 4604 Bottom. 4674 Total Depth of Well. 4674 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Topeka Lime	Dry	3570		13-3/8 OD	147'	None
Lansing Lime	Dry	3805				
Arbuckle Dolomite	Sulphur Water	4604				

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Hole was filled with rotary mud from 4674 to 155, wooden plug was set at 155 and 25 sacks cement dumped from 155 to 130; Hole was then mudded from 130 to 15 and ten sacks cement dumped from 15 to 5 feet or bottom of cellar.

**PLUGGING**  
FILE # 31-102-270  
BOOK PAGE 3 LINE 42

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to. G. A. Younie

Address. Box 35, Gorham, Kansas

STATE OF KANSAS, COUNTY OF RUSSELL

G. A. Younie (employee of owner) or owner or operator of the above-described well,


being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *G. A. Younie* Field Supt.

Box 35, Gorham, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 25 day of November, 19 46

My commission expires 12-31-49

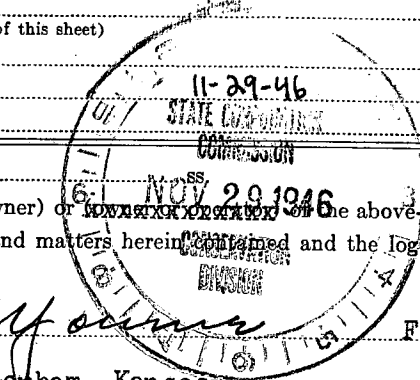

*R. J. Baynes*  
Notary Public.