

15-181-20004-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

Sherman County. Sec. 10 Twp. 10S Rge. 41 ~~EX~~ (W) West

Location as "NE/CNW/SW" or footage from lines C NE NE

Lease Owner Mack Oil Co.

Lease Name Mary Browne Well No. 1

Office Address 812 Union Center Bldg., Wichita, Kansas 67202

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed January 30 19 69

Application for plugging filed January 30 19 69

Application for plugging approved January 30 19 69


Plugging commenced January 31 19 69

Plugging completed January 31 19 69

Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production \_\_\_\_\_ 19 \_\_\_\_\_

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

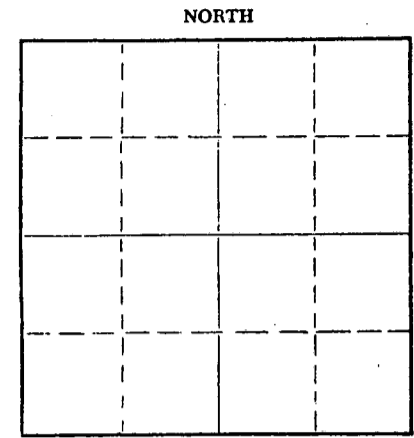

Name of Conservation Agent who supervised plugging of this well W. L. Nichols

Producing formation None Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 5330 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plugging information:

Plugged with 120 sacks cement @ 2350' to 1960'

25 sacks cement @ 400' to 225'

5 sacks cement @ 30' to top

Plug down @ 5:30 p.m., January 31, 1969

State Conservation Agent: W. L. Nichols

RECEIVED  
STATE CORPORATION COMMISSION  
FEB 5 1969  
CONSERVATION DIVISION  
Wichita, Kansas  
02-05-1969

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor MACK OIL CO.

Address P. O. Box 400, Duncan, Oklahoma 73533

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
Robert L. Harris (employee of owner) or (owner or operator) of the above-described


well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above described well as filed and that the same are true and correct. So help me God.

(Signature) Robert L. Harris

812 Union Center Bldg., Wichita, Kansas 67202  
(Address)

Subscribed and Sworn to before me this 3rd day of February, 19 69

My commission expires September 21, 1972



Elizabeth F. Nice  
Elizabeth F. Nice  
Notary Public.

15-181-20004-00-00

MACK OIL CO.  
Duncan, Oklahoma  
73533

RECEIVED  
STATE CORPORATION COMMISSION  
FEB 5 1969  
CONSERVATION DIVISION  
Wichita, Kansas

02-05-1969

DRILLERS WELL LOG

#1 Mary Browne

Commenced R. D.: 1-15-69  
Completed R. D.: 1-30-69  
Rotary Total Depth: 5330'

C NE NE - Section 10-10S-41W  
Sherman County, Kansas  
Elevation: 3813' Kelly Bushing  
Initial Production: Dry  
Contractor: Mack Oil Co.

STRATA	DEPTH
Sand & Shale	0 - 220'
Shale	220 - 535
Shale & Chalk	535 - 1438
Shale w/Chalk Strks	1438 - 1873
Chalk & Sand	1873 - 2257
Sand	2257 - 2375
Sand & Shale	2375 - 2610
Shale & Shells	2610 - 2777
Sand & Shale	2777 - 2901
Shale, Shells & Red Rock	2901 - 3080
Lime & Shale	3080 - 3239
Anhydrite	3239 - 3311
Shale & Shells with Anhydrite stringers	3311 - 3468
Shale & Shells	3468 - 3624
Anhydrite & Shale	3624 - 3690
Lime & Shale	3690 - 3835
Lime	3835 - 5125
Sand & Chert	5125 - 5163
Cherty Sand	5163 - 5226
Sand & Lime	5226 - 5279
Lime & Chert	5279 - 5305
Lime	5305 - 5330' - R. T. D.

I hereby certify that the above is a true and correct log of said well as reflected by the daily drilling reports.

MACK OIL CO.

By Joel C. Tinsmon  
Joel C. Tinsmon

Signed and sworn to in my presence this 4th day of February, 1969, by Joel C. Tinsmon, representative of Mack Oil Co.



Elizabeth F. Nice  
Elizabeth F. Nice, Notary Public