

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

WCP

API Well Number: 15-033-20069-00-00

Spot: NESE

Sec/Twnshp/Rge: 15-31S-18W

1808 ~~1830~~ feet from S Section Line, ~~660~~ feet from E Section Line

Lease Name: SCHROCK

732 Well #: 1-15

County: COMANCHE

Total Vertical Depth: 5139 feet

Operator License No.: 33999
Op Name: LINN OPERATING, INC.
Address: 600 TRAVIS STE 7000
HOUSTON, TX 77002

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		5030		WITH 2 SX CMT
PROD	4.5	5139	1016	WITH 150 SX CMT
SURF	8.625	480		WITH 400 SX CMT

167.02

Well Type: GAS

UIC Docket No:

Date/Time to Plug: 11/05/2008 8:15 AM

Plug Co. License No.: 4072

Plug Co. Name: PLAINS, INC

Proposal Rcvd. from: DAVID CONRADY

Company:

Phone: (405) 942-8877

Proposed Plugging Method: SET CIBP @ 5030' WITH 2 SX CMT. PLUG AT 1060' WITH 12 SX GEL & 50 SX CMT. PLUG AT 520' WITH 50 SX CMT. PLUG AT 40' WITH 15 SX CMT.

Plugging Proposal Received By: ERIC MACLAREN

Witness Type: COMPLETE (100%)

Date/Time Plugging Completed: 11/05/2008 10:10 AM

KCC Agent: ERIC MACLAREN

Actual Plugging Report:

SET CIBP @ 5030' WITH 2 SX CMT. 1ST PLUG AT 1016' WITH 12 SX GEL & 50 SX CMT. 2ND PLUG AT 520' WITH 50 SX CMT. 3RD PLUG AT 60' WITH 30 SX CMT. CMT CIRCULATED.

Perfs:

Top	Bot	Thru	Comments
5032	5072		


INVOICED
DATE 12-16-08
INV. NO. 2009060842

RECEIVED
KANSAS CORPORATION COMMISSION
NOV 19 2008
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: CSG

District: 01

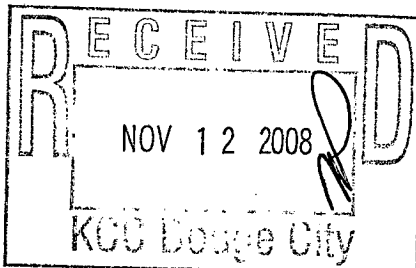

Signed Eric MacLaren
(TECHNICIAN)

Form CP-2/3

PKT
[Signature]