

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-187-20796-00-00
Spot: E2SE Sec/Twnshp/Rge: 8-30S-39W
1300 feet from S Section Line, 656 feet from E Section Line
Lease Name: CHRISTOPHER JARED Well #: 1-8
County: STANTON Total Vertical Depth: 5925 feet

Operator License No.: 32309
Op Name: PRESCO WESTERN LLC
Address: 5665 FLATIRON PKWY
BOULDER, CO 80301

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		1650		WITH 2 SX CMT
CIBP		5540		WITH 2 SX CMT 192.56
PROD 4.5		5925	0	
SURF 8.625	1588			CMT TO SURFACE

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 10/31/2008 9:00 AM
Plug Co. License No.: 34069 Plug Co. Name: BASIC ENERGY SERVICES, LP
Proposal Rcvd. from: STEVE RIDENOUR Company: PRESCO WESTERN Phone: (303) 444-8881

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING

Plugging Proposal Received By: KEN JEHLIK WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 10/31/2008 6:00 PM KCC Agent: JACK MACLASKEY

Actual Plugging Report:

CIBP @ 5540' WITH 2 SX CMT. CIBP @ 1650' WITH 2 SX CMT. TESTED 4 1/2" CASING TO 700 PSI. PERFORATE 4 1/2" @ 600'. PRESSURED TO 1000 PSI. COULDN'T PUMP INTO. RUN CMT BOND LOG. SHOWED CMT STRINGERS FROM 200' DOWN. PERFORATE 4 1/2" @ 105'. RUN IN HOLE WITH TBG TO 630'. PUMP 120 SX CMT TO SURFACE. CMT CIRCULATED UP 4 1/2" & 8 5/8" ANNULUS TO SURFACE.

Perfs:


INVOICED
DATE 12-10-08
INV. NO. 2009060849

RECEIVED
KANSAS CORPORATION COMMISSION
NOV 19 2008
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY BASIC ENERGY.

Plugged through: TBG

District: 01

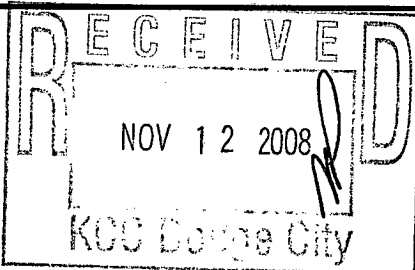

Signed _____

Jack MacLaskey
(TECHNICIAN)