


15-167-20752-00-00

FORM CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

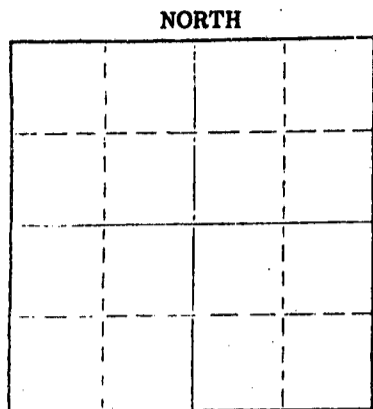

Locate well correctly on above Section Plot

Russell County, Sec. 26 Twp. 11 Rge. 15 (E) W (W)
Location as "NE/CNW/SW" or footage from lines N/2 NW SW
Lease Owner Shields Oil Producers, Inc.
Lease Name Eulert "C" Well No. 2
Office Address Shields Building, Russell, Kansas 67665
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed 7-4 19 75
Application for plugging filed 7-4 19 75
Application for plugging approved 7-4 19 75
Plugging commenced 7-4 19 75
Plugging completed 7-4 19 75
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production _____ 19 ____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Duane Rankin
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3,344 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	272'	Cmtd. w/165 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fill hole with heavy mud
Push plug to 480'
Spotted 40 sax cement on plug thru 4 1/2" drill pipe
Fill hole with heavy mud
Push plug to 240'
Spotted 25 sax cement on plug thru 4 1/2" drill pipe
Push plug to 40' with 1/2 sax hulls on plug
Dump 10 sax cement on plug to cellar

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Shields Drilling Company, Inc.
Address Shields Building, Russell, Kansas 67665

STATE OF KANSAS COUNTY OF RUSSELL
R. L. Shields ~~Representative~~ (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R L Shields

Shields Building, Russell, Kansas
(Address)

Subscribed and sworn to before me this 10th day of July, 19 75



Rush Phillips
Notary Public.

RECEIVED
STATE CORPORATION COMMISSION
7-14-1975
JUL 14 1975

CONSERVATION DIVISION
Wichita, Kansas




Shields

Russell, Kansas

WELL LOG

Operator: Shields Oil Producers, Inc.
 Well: Eulert "C" #2
 Commenced: June 25, 1975
 Completed: July 4, 1975
 Contractor: Shields Drilling Company, Inc.

Well Description: N/2 NW SW
 Sec. 26-11S-15W
 Russell County, Kansas



CASING RECORD		
Size	Run	Pulled
8 5/8"	272'	Cmtd. w/165 sax

Elevation: 1,846' KB

Treatment:

Production: D & A

Tops:

..... Figures Indicate Bottom of Formations

Clay	50'
Shale	345'
Redbed, shale & sand	934'
Anhydrite	968'
Shale	1,600'
Shale & lime	2,800'
Lime	3,344' RTD

RECEIVED
 STATE CORPORATION COMMISSION
 7-14-1975
 JUL 14 1975

CONSERVATION DIVISION
 Wichita, Kansas

Notes