


15-167-20745-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

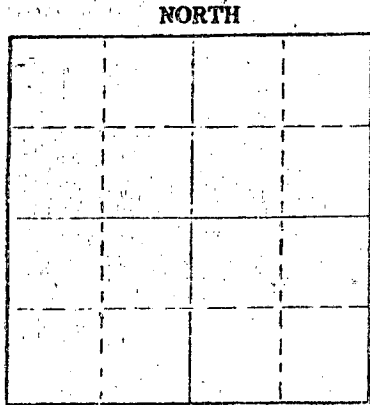

Locate well correctly on above Section Plat

Russell County, Sec. 26 Twp. 11 Rge. 15 (E) W (W)  
Location as "NE/CNWSW" or footage from lines NW/4 SW/4 NW/4  
Lease Owner Shields Oil Producers, Inc.  
Lease Name Eulert "C" Well No. 1  
Office Address Shields Building, Russell, Kansas 67665  
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole  
Date well completed 6-12 1975  
Application for plugging filed 6-12 1975  
Application for plugging approved 6-12 1975  
Plugging commenced 6-12 1975  
Plugging completed 6-12 1975  
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 10  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Duane Rankin  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3,313 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	265'	Cmtd. w/ 150 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Fill hole with heavy mud  
Push plug to 480'  
Spotted 40 sax cement on plug thru 4 1/2" drill pipe  
Fill hole with heavy mud  
Push plug to 240'  
Spotted 25 sax cement on plug thru 4 1/2" drill pipe  
Push plug to 40' with 1/2 sax hulls on plug  
Dump 10 sax cement on plug to cellar

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Shields Drilling Company, Inc.  
Address Shields Building, Russell, Kansas 67665

STATE OF KANSAS COUNTY OF RUSSELL ss.  
R. L. Shields (executor of estate) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. L. Shields  
Shields Building, Russell, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 20th day of June, 1975  
My commission expires May 26, 1979  
Ruth Phillips  
Notary Public.



RECEIVED  
STATE CORPORATION COMMISSION  
6-24-1975  
JUN 24 1975  
CONSERVATION DIVISION  
Wichita, Kansas




# Shields

Russell, Kansas

## WELL LOG

Operator: Shields Oil Producers, Inc.  
 Well: Eulert "C" #1  
 Commenced: June 2, 1975  
 Completed: June 12, 1975  
 Contractor: Shields Drilling Company, Inc.

Well Description: NW SW NW  
 Sec. 26-11S-15W  
 Russell County, Kansas



Elevation: 1,807' RB

Treatment:

Production: D & A

Tops:

### CASING RECORD

Size	Run	Pulled
8 5/8"	265'	Cmtd. w/ 150 sax

..... Figures Indicate Bottom of Formations .....

Clay & shale	377'
Sand & shale	505'
Shale	600'
Redbed & shale	888'
Anhydrite	926'
Shale	1,030'
Shale & shells	1,530'
Shale & lime	2,870'
Lime	3,313' RTD

Notes

**RECEIVED**  
 STATE CORPORATION COMMISSION  
 6-24-1975  
 JUN 24 1975  
 CONSERVATION DIVISION  
 Wichita, Kansas