

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-23288-00-00
Spot: W2 Sec/Twnshp/Rge: 36-21S-12W
2590 feet from S Section Line, 1770 feet from W Section Line
Lease Name: HULLMAN SITTNER Well #: 1
County: STAFFORD Total Vertical Depth: 3680 feet

Operator License No.: 6170
Op Name: GLOBE OPERATING, INC.
Address: PO BOX 12
GREAT BEND, KS 67530

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		3570		
PROD	5.5	3680	2121	WITH 200 SX CMT 119.60
SURF	8.625	618		WITH 350 SX CMT

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 11/13/2008 9:00 AM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: MIKE KELSO Company: MIKE'S TESTING & SALVAGE, INC. Phone: (620) 938-2537

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 11/13/2008 11:50 AM KCC Agent: RICHARD LACEY

Actual Plugging Report:

SANDED TO 3250' & 5 SX CMT WITH BAILER. SPOTTED PLUGS THROUGH CASING WHILE PULLING. 1ST PLUG AT 668' WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 300' WITH 40 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:

Top	Bot	Thru	Comments
3500	3530		
3306	3408		

INVOICED

DATE 12-22-08

INV. NO. 2009060871

RECEIVED
KANSAS CORPORATION COMMISSION


DEC 01 2008

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: CSG

CONSERVATION DIVISION
WICHITA, KS

District: 01

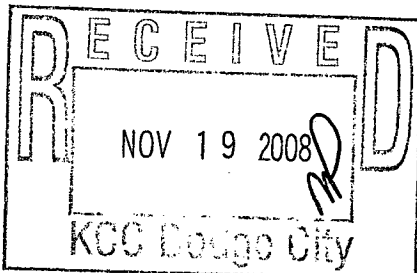

Signed

Richard W. Lacey

(TECHNICIAN)

Form CP-32

[Signature]
[Signature]