

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

KCC PFEIFER  
SEP 5

API Well Number: 15-007-20527-00-00  
Spot: N2 NWNE Sec/Twnshp/Rge: 32-32S-12W  
4926 4950 Teet from S Section Line, 1980 Teet from E Section Line  
Lease Name: THOMAS/FORSYTH 2142 Well #: 9  
County: BARBER Total Vertical Depth: 4521 feet

Operator License No.: 33168  
Op Name: WOOLSEY OPERATING COMPANY, LL  
Address: 125 N MARKET STE 1000  
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	4518	2390	WITH 75 SX CMT
SURF	8.625	232		WITH 175 SX CMT <u>146.93</u>

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 11/06/2008 10:00 AM  
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.  
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 727-3410

Proposed Plugging Method: CIBP @ 4400' & 4 SX CMT. PLUG AT 600' WITH 10 SX GEL & 50 SX CMT. PLUG AT 260' WITH 50 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 11/06/2008 11:00 AM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SANDED BACK TO 4420' & PUT 4 SX CMT ON TOP OF SAND BRIDGE THROUGH DUMP BAILER. SPOT PLUGS THROUGH 4 1/2" CASING. 1ST PLUG AT 600' WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 260' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:


Top	Bot	Thru	Comments
4470	4490		

**INVOICED**  
DATE 12-22-08  
INV. NO. 2009060892

RECEIVED  
KANSAS CORPORATION COMMISSION  
NOV 24 2008  
CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY QUALITY OILWELL CEMENTING.  
Plugged through: CSG

District: 01

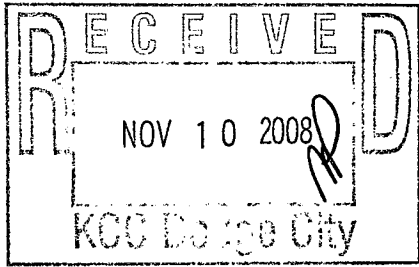

Signed Stephen J. Pfeifer (TECHNICIAN)