

KCC P16 PS
Senw

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-007-20744-00-00

Spot: SESW

Sec/Twnshp/Rge: 29-32S-12W

893 ~~660~~ Feet from S Section Line, ~~1980~~ Feet from W Section Line

Lease Name: THOMAS/FORSYTH 3348 Well #: 12

County: BARBER

Total Vertical Depth: 4500 feet

Operator License No.: 33168

Op Name: WOOLSEY OPERATING COMPANY, LL

Address: 125 N MARKET STE 1000
WICHITA, KS 67202

String Size Depth (ft) Pulled (ft) Comments

PROD 4.5 4498 2950 WITH 75 SX CMT

SURF 8.625 211 WITH 175 SX CMT 146.25

Well Type: OIL

UIC Docket No:

Date/Time to Plug: 11/13/2008 9:15 AM

Plug Co. License No.: 31925

Plug Co. Name: QUALITY WELL SERVICE, INC.

Proposal Rcvd. from: RICHARD MCINTYRE

Company: QUALITY WELL SERVICE, INC.

Phone: (620) 727-3410

Proposed Plugging Method: SANDED BACK TO 4380' & 4 SX CMT. PLUG AT 600' WITH 10 SX GEL & 50 SX CMT. PLUG AT 240' WITH 50 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER

WitnessType: COMPLETE (100%)

Date/Time Plugging Completed: 11/13/2008 10:30 AM

KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SANDED BACK TO 4380' & PUT 4 SX CMT ON TOP OF SAND BRIDGE THROUGH DUMP BAILER. SPOT PLUGS THROUGH 4 1/2" CASING. 1ST PLUG AT 600' WITH 10 SX GEL & 50 SX CMT WITH 50# HULLS. 2ND PLUG AT 240' WITH 50 SX CMT WITH 50# HULLS. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:

Top	Bot	Thru	Comments
4453	4458		
4440	4445		
4438	4464		

INVOICED

DATE 12-22-08

INV. NO. 2009060892

RECEIVED
KANSAS CORPORATION COMMISSION


NOV 24 2008

CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL 3% CC BY QUALITY OILWELL CEMENTING.

Plugged through: CSG

District: 01

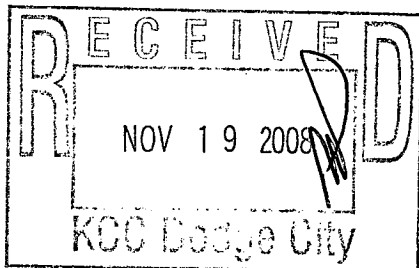

Signed

Stephen J. Pfeifer
(TECHNICIAN)

Form CP-23