


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

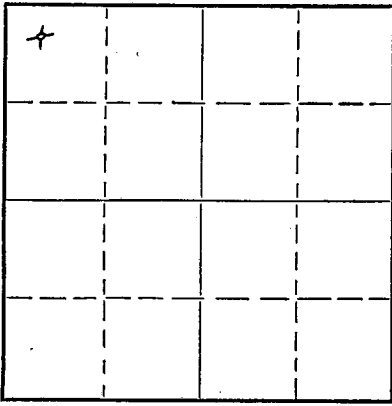

Locate well correctly on above
Section Flat

Graham County. Sec. 20 Twp. 9S Rge. 23 (E) W (W)
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines NW NW NW
Lease Owner Peel-Hardman
Lease Name Robinson Well No. 1
Office Address P. O. Box 359 Hoisington, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed May 11 1951
Application for plugging filed May 11 1951
Application for plugging approved May 11 1951
Plugging commenced May 11 1951
Plugging completed May 11 1951
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well E. R. Petty
Producing formation Depth to top Bottom Total Depth of Well 4368 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
		0	173	8 5/8"	173'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

4368' - 166 $\frac{1}{2}$ ' - Heavy Rotary Mud
166 $\frac{1}{2}$ ' - 165' - Wooden Plug
165' - 119' - 15 sacks cement
119' - 41 $\frac{1}{2}$ ' - Heavy Rotary Mud
41 $\frac{1}{2}$ ' - 40' - Wooden Plug
40' - 6' - 10 sacks cement
6' - Surface - Cellar

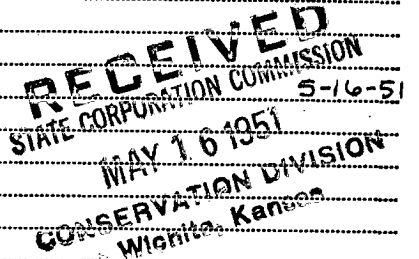

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Peel-Hardman
Address P. O. Box 359 Hoisington, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Peel-Hardman (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. PEEL-HARDMAN

(Signature) BY: *Wm Herbert*
P. O. Box 359 Hoisington, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 15th day of May, 1951

Marian M. Herber
Notary Public.

My commission expires June 4, 1951

PLUGGING
FILE SEC 209 9 R 234
BOOK PAGE 88 LINE 15

DRILLER'S LOG

Company: Peel-Hardman

NW NW NW

Sec. 20, Twp. 9S, Rgwa 23W

Farm: Robinson Well No. 1

Comm: 4-27-51 Comp: 5-11-51

County: Graham,

Kansas

Total Depth: 4368

Elevation: 2401 KB

Contractor: Peel-Hardman

Casing:

8 5/8" 173' cem.

Production: Dry

Figures below indicate bottom of formations

Surface Clay	0 -	173
Shale & Shells		595
Sand		650
Shale		850
Shale & Sand		2020
Anhydrite		2085
Shale & Shells		2200
Shale, Shells, & Red Bed		2500
Shale & Shells		3205
Lime & Shale		3755
Lime		4305
Shale & Lime		4355
Lime		4368
Total Depth		4368

This is to certify that the above information is, to the best of our knowledge true and correct.

PEEL-HARDMAN

BY: *Walter Herbert*

SUBSCRIBED AND SWORN to before me this 15th day of May, 1951.

My commission expires June 4, 1951 *Marian M. Herbert*
Notary Public

