

15-065-00530-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Graham County, Sec. 20 Twp. 9S Rge. 23W (E) (W)

Location as "NE/CNW&SW&" or footage from lines NW NW SE

Lease Owner Imperial Oil of Kansas, Inc.

Lease Name Ernst Well No. 2

Office Address Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed February 1, 19 58

Application for plugging filed February 1, 19 58

Application for plugging approved February 1, 19 58


Plugging commenced February 1, 19 58

Plugging completed February 1, 19 58

Reason for abandonment of well or producing formation No commercial quantities of oil found.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

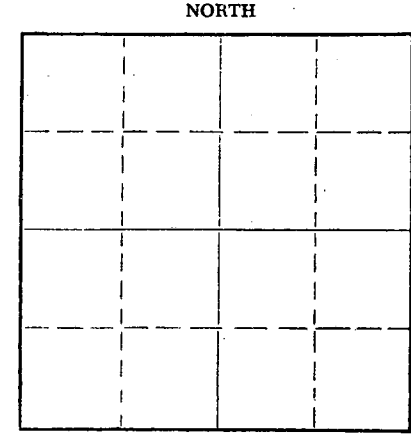

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well A. D. Fabricius, Box 731 Hill City, Ks.

Producing formation Depth to top Bottom Total Depth of Well 3960 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	1-22-58	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Set No. 1 plug at 550 feet with 25 sacks cement. Set No. 2 plug at 215' with 15 sacks cement. No. 3 plug at 40' with 10 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
2-20-58
FEB 20 1958

CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor Imperial Oil of Kansas, Inc.
Address 780 Fourth National Bldg., Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss. Stanley J. Bounds


(employee of owner, operator or lessee) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Stanley J. Bounds V-P
780 Fourth National Bldg., Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 19th day of February, 1958

My commission expires December 19, 1960

Louetta M. Duncan Notary Public.



PLUGGING
FILE SEC 20 T 9 R 236
BOOK PAGE 80 LINE 39

DRILLER'S LOG

Imperial Oil of Kansas, Inc.
780 Fourth National Building
Wichita 2, Kansas

Ernst No. 2
NW NW SE Sec. 20-9S-23W
Graham County, Kansas

Total Depth: 3960'

Commenced: 1-22-58 Completed: 2-²⁷~~8~~-58 ^{KCC}

Elevation: 2397' RB
Production: D & A

Contractor: Imperial Oil of Kansas, Inc.
Wichita, Kansas

Casing Record: Set 8-5/8" Surface Pipe at 221' with 150 sacks cement.

Figures indicate bottom of formations:

Surface Clay & Sand	221'		<u>TOPS</u>	
Shale & Shells	1455'	Anhydrite	1895'	{ / 502
Shale, Red Bed & Shells	1895'	Heebner	3696'	{ -1299
Anhydrite	1925'	Toronto	3719'	{ -1322
Shale & Shells	2170'	Lansing	3736'	{ -1339
Shale & Lime	3485'	Rotary Total Depth	3960'	{ -1563
Lime	3960'			
Total Depth	3960'			

We hereby certify this to be a correct and accurate log of the above described well as shown on the daily drilling reports.

IMPERIAL OIL OF KANSAS, INC.

By: Stanley J. Bannard
Vice-President



Subscribed and sworn to before me this 19th day of February, 1958.

My Commission Expires:

December 19, 1960 **RECEIVED**
STATE CORPORATION COMMISSION

Louise M. Duncan
Notary Public

FEB 20 1958

CONSERVATION DIVISION
Wichita, Kansas

PLUGGING
FILE SEC 20 T 9 R 236
BOOK PAGE 80 LINE 39