

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

KCC Perf  
2902 2540

API Well Number: 15-129-00240-00-00  
Spot: SWSWSWNE Sec/Twnshp/Rge: 18-32S-40W  
~~2540~~ Feet from ~~A~~ Section Line, 2540 feet from E Section Line  
Lease Name: CHURCH TWIN Well #: 2  
County: MORTON Total Vertical Depth: 2368 feet

Operator License No.: 32334  
Op Name: CHESAPEAKE OPERATING, INC.  
Address: 6200 N WESTERN AVE PO BOX 18496  
OKLAHOMA CITY, OK 73118

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		670		WITH 2 SX CMT
CIBP		1694		WITH 2 SX CMT
CIBP		2275		WITH 2 SX CMT
PROD	5.5	2358	0	WITH 150 SX CMT
SURF	8.625	480		WITH 300 SX CMT

76.96

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 11/25/2008 8:00 AM  
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY  
Proposal Rcvd. from: DENNIS FRICK Company: CHESAPEAKE OPERATING Phone: (405) 848-8000

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING.

Plugging Proposal Received By: KEN JEHLIK Witness Type: COMPLETE (100%)  
Date/Time Plugging Completed: 12/09/2008 1:00 PM KCC Agent: JACK MACLASKEY

Actual Plugging Report:

CIBP @ 2275' WITH 2 SX CMT. CIBP @ 1694' WITH 2 SX CMT. CIBP @ 670' WITH 2 SX CMT. PUMPED INTO 5 1/2" TO TEST CASING. PUMPED 1 BBL MINUTE @ 100 PSI. HAD BLOW ON ANNULUS. 12/9/08: PERFORATE 5 1/2" @ 600'. RUN IN HOLE WITH CMT RETAINER ON 2 3/8" TBG, SET AT 525'. PUMPED 125 SX CMT. CIRCULATED TO SURFACE. PULL OUT OF RETAINER & FILLED 5 1/2" WITH 50 SX CMT.

Perfs:

Top	Bot	Thru	Comments
2283	2317		WINFIELD
2238	2260		HERRINGTON/KRI
1550	1562		GLORIETTA

INVOICED

DATE 1-15-09  
INV. NO. 2009061013

RECEIVED  
KANSAS CORPORATION COMMISSION


DEC 19 2008

CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: TBG

District: 01

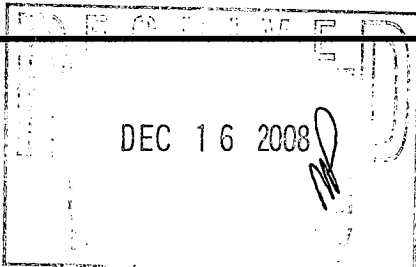

Signed Jack MacLaskey  
(TECHNICIAN)

Form 227