

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-151-11024-00-00
Spot: SESWSE Sec/Twnshp/Rge: 3-27S-15W
330 feet from S Section Line, 1650 feet from E Section Line
Lease Name: LEMON Well #: 1
County: PRATT Total Vertical Depth: 4472 feet

Operator License No.: 31925
Op Name: QUALITY WELL SERVICE, INC.
Address: 190 US HWY 56
ELLINWOOD, KS 67526

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	4472	2275	N/A
SURF	8.625	205		N/A

145.34

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 12/04/2008 5:30 PM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 727-3410

Proposed Plugging Method: SAND TO 4260' & 5 SX CMT. PLUG AT 1200' WITH 50 SX CMT. PLUG AT 600' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: STEVE DURRANT WitnessType: NONE
Date/Time Plugging Completed: 12/04/2008 7:00 PM KCC Agent: STEVE DURRANT

Actual Plugging Report:

SANDED BACK TO 4260' & PUT 5 SX CMT ON TOP OF SAND BRIDGE THROUGH DUMP BAILER. 1ST PLUG AT 1200' WITH 15 SX GEL & 50 SX CMT WITH 100# HULLS. 2ND PLUG AT 600' WITH 50 SX CMT WITH 50# HULLS. 3RD PLUG AT 230' WITH 40 SX CMT. 4TH PLUG AT 40' WITH 10 SX CMT.

Perfs:

Top	Bot	Thru	Comments
4393	4398		


INVOICED
DATE 1-15-09
INV. NO. 2009061022

RECEIVED
KANSAS CORPORATION COMMISSION
DEC 19 2008
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL 3% CC BY QUALITY OILWELL CEMENTING.

Plugged through: CSG

District: 01

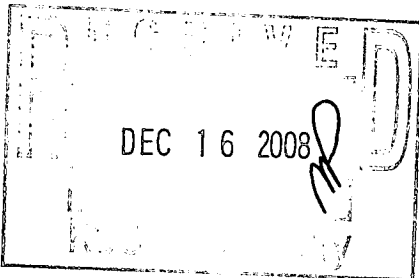

Signed

Steve Durrant
(TECHNICIAN)

PKT