

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-129-21792-00-00
Spot: SWSWNW Sec/Twnshp/Rge: 26-32S-40W
2310 feet from N Section Line, 330 feet from W Section Line
Lease Name: DOS REATAS Well #: 5-E26-32-40
County: MORTON Total Vertical Depth: 5982 feet

Operator License No.: 32309
Op Name: PRESCO WESTERN LLC
Address: 5665 FLATIRON PKWY
BOULDER, CO 80301

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		5300		
CIBP		5430		194.42
CIBP		5580		
PROD	4.5	5986	0	WITH 350 SX CMT
SURF	8.625	1578		WITH 725 SX CMT

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 12/31/2008 8:00 AM
Plug Co. License No.: 34069 Plug Co. Name: BASIC ENERGY SERVICES, LP
Proposal Rcvd. from: STEVE RIDENOUR Company: PRESCO WESTERN Phone: (303) 444-8881

Proposed Plugging Method: PLUG 1: CIBP @ 5300 W/ 2 SKS CMT. PLUG 2: 40 SKS 60/40 POZ CMT @ 1650'. PLUG 3: 60 SKS 60/40 POZ CMT @ 600'. PLUG 4: TIE ONTO SURFACE SSG AND WITH W/ CMT TO SURFACE.

Plugging Proposal Received By: JACK MACLASKEY Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 12/31/2008 2:00 PM KCC Agent: JACK MACLASKEY

Actual Plugging Report:

CIBP @ 5580'. CIBP @ 5430'. CIBP @ 5300'. (UNABLE TO GET 10' CMT BAILER PAST 2200'. NO CMT ON TOP OF CIBP.) 1ST PLUG AT 1650' WITH 40 SX CMT. 2ND PLUG AT 600' WITH 50 SX CMT. CMT AT SURFACE ON BACKSIDE.

Perfs:

Top	Bot	Thru	Comments
5614	5620		ST. LOUIS
5508	5524		MORROW
5441	5458		ISOLATED
5372	5386		MORROW

INVOICED
DATE 2-5-09
INV. NO. 2009061167

RECEIVED
KANSAS CORPORATION COMMISSION


JAN 29 2009

CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY BASIC ENERGY.

Plugged through: TBG

District: 01

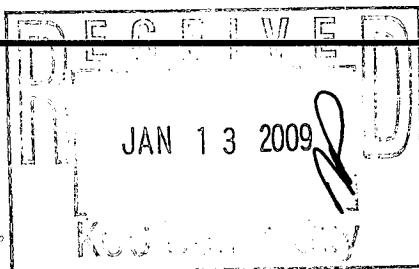

Signed Jack MacLaskey
(TECHNICIAN)

PCT