

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-187-21142-00-00
Spot: NESWSESW Sec/Twnshp/Rge: 1-30S-39W
554 feet from S Section Line, 1767 feet from W Section Line
Lease Name: KATHERINE TRUST Well #: 4-N1-30-39
County: STANTON Total Vertical Depth: 1916 feet

Operator License No.: 32309
Op Name: PRESCO WESTERN LLC
Address: 5665 FLATIRON PKWY
BOULDER, CO 80301

62.27

Well Type: LH UIC Docket No: _____ Date/Time to Plug: 01/05/2009 6:00 PM

Plug Co. License No.: 33793 Plug Co. Name: H2 DRILLING LLC

Proposal Rcvd. from: GARY TALBOT Company: H2 DRILLING LLC Phone: _____

Proposed Plugging Method: PLUG AT 600' WITH 80 SX CMT. PLUG AT 440' WITH 80 SX CMT. PLUG AT 60' WITH 30 SX CMT. CIRCULATE RAT HOLE WITH 30 SX CMT. CIRCULATE MOUSE HOLE WITH 20 SX CMT

Plugging Proposal Received By: STEVE PFEIFER WitnessType: NONE
Date/Time Plugging Completed: 01/06/2009 2:00 AM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

Perfs:

****STUCK DRILL PIPE. 1ST BACK-OFF @ 1213'. STILL STUCK. 2ND BACK-OFF @ 836'. STILL STUCK. CONTRACTOR DECISION TO ATTEMPT TO WASH DOWN 2 3/8" TBG ALONG SIDE OF DRILL PIPE. 2 3/8" WASH PIPE TO 310'. STUCK TBG.** 1ST PLUG PERFORATE DRILL PIPE @ 600'. MIX & PUMP 100 SX CMT. MAXIMUM PRESSURE 600# W/4 BBL PER MINUTE. LEFT DRILL PIPE FULL OF CMT. 2ND PLUG MIX & PUMP 150 SX CMT @ 310'. CMT CIRCULATED TO SURFACE.**


INVOICED
DATE 2-5-09
INV. NO. 2009061167

RECEIVED
KANSAS CORPORATION COMMISSION
JAN 21 2009
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: DP

District: 01

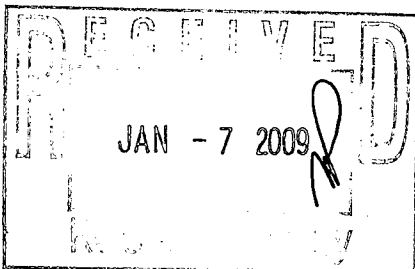

Signed

Stephen J. Pfeifer
(TECHNICIAN)

Form CP-2/3

PST