

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-119-10232-00-01

Spot: ^{SW} NWSWNW

Sec/Twnshp/Rge: 25-34S-30W

KCC PEST per GPS
3274 feet from S Section Line, 4822 feet from E Section Line

Lease Name: ADAMS D

Well #: 5

County: MEADE

Total Vertical Depth: 5465 feet

Operator License No.: 5225

String Size Depth (ft) Pulled (ft) Comments

Op Name: QUINQUE OPERATING COMPANY

I 9.625 2708 0 WITH 800 SX CMT

177.61

Address: 908 NW 71ST ST

PROD 5.5 5464 0 WITH 400 SX CMT TOC @3464

OKLAHOMA CITY, OK 73116

SURF 13.38 649 0 WITH 500 SX CMT

Well Type: EOR

UIC Docket No: E06354.1

Date/Time to Plug: 12/30/2008 8:00 AM

Plug Co. License No.: 33311

Plug Co. Name: PHIL DOLLAR OILFIELD SERVICES, INC.

Proposal Rcvd. from: PHIL DOLLAR

Company: PHIL DOLLAR OILFIELD SERVICE

Phone: (806) 435-3373

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING

Plugging Proposal Received By: STEVE DURRANT

WitnessType: COMPLETE (100%)

Date/Time Plugging Completed: 01/02/2009 2:00 PM

KCC Agent: JACK MACLASKEY

Actual Plugging Report:

Perfs:

OBSERVED CMT BETWEEN 13 3/8" & 9 5/8" ANNULUS. EST. TOC OF 2 3/8" X 5 1/2" WAS REPORTED AS 216'. 12/30/08: 1ST PLUG PUMPED 100 SX CMT DOWN 2 3/8". TBG ON STRONG VACUUM. 2ND PLUG WAIT ON CMT 2 HOURS. PUMPED 100 SX CMT. TBG STILL ON STRONG VACUUM. SDFN. 1/2/09: 3RD PLUG RIHWL. TAGGED TOC @ 1200'. PUMP DOWN 2 3/8" TBG & CIRCULATED CMT TO SURFACE WITH 50 SX CMT. 4TH PLUG RAN 1" IN 9 5/8" X 5 1/2". FILLED CASING TO SURFACE WITH 10 SX CMT.

Top	Bot	Thru	Comments
5350	5357		

INVOICED
DATE 2-5-09
INV. NO. 2009061168


RECEIVED
KANSAS CORPORATION COMMISSION
JAN 29 2009

Remarks: USED 60/40 POZMIX 4% GEL BY PHIL DOLLAR

CONSERVATION DIVISION
WICHITA, KS

Plugged through: CSG

District: 01

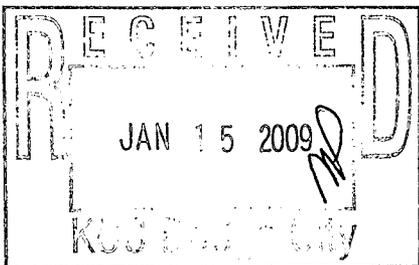

Signed

Jack MacLaskey
(TECHNICIAN)

Handwritten initials and 'PEST' stamp