

Notice: Fill out COMPLETELY and return to Conservation Division at the address below within 60 days from plugging date.

KANSAS CORPORATION COMMISSION OIL & GAS CONSERVATION DIVISION WELL PLUGGING RECORD K.A.R. 82-3-117

Form CP-4 December 2003 Type or Print on this Form Form must be Signed All blanks must be Filled

Lease Operator: Ritchie Exploration, Inc. Address: P. O. Box 783188 Phone: (316) 691-9500 Operator License #: 4767 Type of Well: Oil Docket #: (Oil, Gas D&A, SWD, ENHR, Water Supply Well, Cathodic, Other) (If SWD or ENHR) The plugging proposal was approved on: 11/07/2008 by: Marvin Mills (KCC District Agent's Name) Is ACO-1 filed? [X] Yes [ ] No If not, is well log attached? [ ] Yes [ ] No Producing Formation(s): List All (If needed attach another sheet) Toronto Depth to Top: 3438' Bottom: 3440' T.D. 3891' LKC Depth to Top: 3454' Bottom: 3539' T.D. 3891'

API Number: 15-195-21276-00-01 Lease Name: Harger B Well Number: 3 Spot Location (QQQQ): SE - NW - NW 990 4247 Feet from [X] North / [X] South Section Line 990 4387 Feet from [X] East / [X] West Section Line Sec. 18 Twp. 11 S. R. 22 [ ] East [X] West County: Trego Date Well Completed: 07/22/1983 Plugging Commenced: 11/07/2008 Plugging Completed: 11/07/2008

KCC PKT per GPS

original

Show depth and thickness of all water, oil and gas formations.

Table with 7 columns: Formation, Content, From, To, Size, Put In, Pulled Out. Rows for Toronto and LKC formations.

Describe in detail the manner in which the well is plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same depth placed from (bottom), to (top) for each plug set.

Pumped 20 bbls FW down 4.50" casing to confirm perms open. Pumped 260 sx 60/40 Pozmix w/ 4% gel + 400 hulls down 4.50" casing. Pressure to 600#, shut in at 200#. Pumped 25 sx 60/40 Pozmix w/ 4% gel down 8.625" casing. Pressure to 50#, shut in. Plugging complete on 11/07/2008 at 10:15 a.m., witnessed and approved by Marving Mills with the KCC.

Name of Plugging Contractor: Allied Cementing License #: 6424 Address: P. O. Box 31 Russell, KS 67665

RECEIVED KANSAS CORPORATION COMMISSION DEC 11 2008


Name of Party Responsible for Plugging Fees: Ritchie Exploration, Inc. State of Kansas County, Trego ss.

Peter J. Fiorini - employee of Ritchie Exploration, Inc. (Employee of Operator) or (Operator) on above-described well, being first duly sworn on oath, says: That I have knowledge of the facts statements, and matters herein contained, and the log of the above-described well is as filed, and the same are true and correct, so help me God.

(Signature) [Handwritten Signature]

(Address) P. O. Box 783188 Wichita, KS 67278-3188

SUBSCRIBED and SWORN TO before me this 10th day of December, 2008. Ronda Messer My Commission Expires: 5/7/12 Notary Public

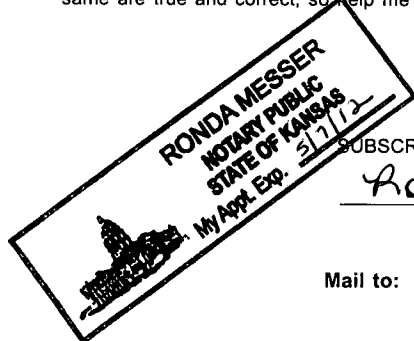

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

PKT

# ALLIEC CEMENTING CO., LLC. 043960

REMIT TO P.O. BOX 31  
RUSSELL, KANSAS 67665

SERVICE POINT:

*Shipped on 7th*

*11-8-08*  
*Water*

*Oakley*  
*11-7-08*

DATE <i>11-8-08</i>	SEC. <i>18</i>	TWP. <i>6L</i>	RANGE <i>22</i>	CALLED OUT	ON LOCATION <i>11:30 pm</i>	JOB START <i>9:30 AM</i>	JOB FINISH <i>10:00 AM</i>
LEASE # <i>5858</i>	WELL # <i>B-3</i>	LOCATION <i>Waterbury in P.H. 40</i>			COUNTY <i>Trego</i>	STATE <i>KS</i>	
OLD OR NEW (Circle one) <i>NEW</i>				<i>SN - 1 1/2 w 5-5</i>			

CONTRACTOR *Express Well Service* OWNER \_\_\_\_\_

TYPE OF JOB *AWP*

HOLE SIZE \_\_\_\_\_ T.D. \_\_\_\_\_

CASING SIZE *4 1/2* DEPTH \_\_\_\_\_

TUBING SIZE \_\_\_\_\_ DEPTH \_\_\_\_\_

DRILL PIPE \_\_\_\_\_ DEPTH \_\_\_\_\_

TOOL \_\_\_\_\_ DEPTH \_\_\_\_\_

PRES. MAX \_\_\_\_\_ MINIMUM \_\_\_\_\_

MEAS. LINE \_\_\_\_\_ SHOE JOINT \_\_\_\_\_

CEMENT LEFT IN CSG. \_\_\_\_\_

PERFS: \_\_\_\_\_

DISPLACEMENT \_\_\_\_\_

**EQUIPMENT**

PUMP TRUCK CEMENTER *Fuzzy*

# *431* HELPER *Alan*

BULK TRUCK \_\_\_\_\_

# *394* DRIVER *Chuck - Russell*

BULK TRUCK \_\_\_\_\_

# \_\_\_\_\_ DRIVER \_\_\_\_\_

**REMARKS:**

*Mix 260sts cement with 400# hulls Press to 600# shut in 200# mix 255sts cement down annulus set shut in press*

*Job complete @ 10:00am*

*Thanks Fuzzy & crew*

CHARGE TO: *Pitcher Exploration*

STREET \_\_\_\_\_

CITY \_\_\_\_\_ STATE \_\_\_\_\_ ZIP \_\_\_\_\_

To Allied Cementing Co., LLC.  
You are hereby requested to rent cementing equipment and furnish cementer and helper(s) to assist owner or contractor to do work as is listed. The above work was done to satisfaction and supervision of owner agent or contractor. I have read and understand the "GENERAL TERMS AND CONDITIONS" listed on the reverse side.

PRINTED NAME \_\_\_\_\_

SIGNATURE *Thomas AAS*

**CEMENT**

AMOUNT ORDERED *350 sts 60/40 4%*

*gel*  
*500# hulls (used 285 sts)*

COMMON	<i>171</i>	@ <i>15 45</i>	<i>2641 95</i>
POZMIX	<i>114</i>	@ <i>8 00</i>	<i>912 00</i>
GEL	<i>10</i>	@ <i>20 00</i>	<i>200 00</i>
CHLORIDE	_____	@ _____	_____
ASC	_____	@ _____	_____
<del>400#</del>	_____	@ _____	_____
<i>Hulls 400#</i>	<i>400#</i>	@ <i>31 25</i>	<i>125 00</i>
HANDLING	<i>367</i>	@ <i>2 40</i>	<i>880 00</i>
MILEAGE <i>110 x 54 mile</i>	_____	@ _____	<i>2202 00</i>
			TOTAL <i>6972 10</i>

**SERVICE**

DEPTH OF JOB	_____	@ _____	<i>900 00</i>
PUMP TRUCK CHARGE	_____	@ _____	_____
EXTRA FOOTAGE	_____	@ _____	_____
MILEAGE <i>60</i>	<i>60</i>	@ <i>7 00</i>	<i>420 00</i>
MANIFOLD	_____	@ _____	_____
			TOTAL <i>1320 00</i>

**PLUG & FLOAT EQUIPMENT**

_____	@ _____	_____
_____	@ _____	_____
_____	@ _____	_____
_____	@ _____	_____
_____	@ _____	_____
TOTAL _____		

SALES TAX (If Any) \_\_\_\_\_

TOTAL CHARGES \_\_\_\_\_

DISCOUNT \_\_\_\_\_ IF PAID IN 30 DAYS

RECEIVED  
KANSAS CORPORATION COMMISSION

DEC 11 2008

CONSERVATION DIVISION  
WICHITA, KS

*AR*