

Notice: Fill out COMPLETELY and return to Conservation Division at the address below within 60 days from plugging date.

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION
WELL PLUGGING RECORD
K.A.R. 82-3-117

Form CP-4
December 2003
Type or Print on this Form
Form must be Signed
All blanks must be Filled

Lease Operator: Ritchie Exploration, Inc.
Address: P. O. Box 783188
Phone: (316) 691-9500 Operator License #: 4767
Type of Well: Oil Docket #: _____
(Oil, Gas D&A, SWD, ENHR, Water Supply Well, Cathodic, Other) (If SWD or ENHR)
The plugging proposal was approved on: 11/07/2008 (Date)
by: Marvin Mills (KCC District Agent's Name)
Is ACO-1 filed? Yes No If not, is well log attached? Yes No
Producing Formation(s): List All (If needed attach another sheet)
Toronto Depth to Top: 3442.5' Bottom: 3449' T.D. 3910'
LKC Depth to Top: 3533.5' Bottom: 3536' T.D. 3910'
Marmaton Depth to Top: 3786' Bottom: 3802' T.D. 3910'

API Number: 15 - 195-20490-00-00
Lease Name: Harger B
Well Number: 1
Spot Location (QQQQ): enw SE - SE - NW
2310 Feet from North / South Section Line
2310 Feet from East / West Section Line
Sec. 18 Twp. 11 S. R. 22 East West
County: Trego
Date Well Completed: 11/14/1978
Plugging Commenced: 11/07/2008
Plugging Completed: 11/07/2008

KCC PRT
CP 2/3

Show depth and thickness of all water, oil and gas formations.

Oil, Gas or Water Records		Casing Record (Surface Conductor & Production)				
Formation	Content	From	To	Size	Put In	Pulled Out
Toronto	Oil & Water	3442.5'	3449'	8.625"	173'	-0-
LKC	Oil & Water	3533.5'	3536'	4.50"	3860'	-0-
Marmaton	Oil & Water	3786'	3802'			

Describe in detail the manner in which the well is plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same depth placed from (bottom), to (top) for each plug set.

Perforated 4.50" csg at 1700' & 850' w/2 SPF. Ran 2 3/8" tubing to 3500'. Pumped 125 sx 60/40 Pozmix w/ 4% gel + 150 hulls. Pulled tubing up to 2300'. Pumped 100 sx 60/40 Pozmix w/ 4% gel + 150 hulls down tubing. Cement circulated to surface. Pulled tubing out of hole. Pumped 75 sx 60/40 Pozmix w/ 4% gel down 4.50" casing. Pressure to 500#, shut in at 350#. Pumped 60 sx 60/40 Pozmix w 4% gel down 8.625" casing Pressure to 100#, shut in at 75#. Plugging complete on 11/07/2008 at 1:15 p.m., witnessed and approved by Marvin Mills with the KCC.

Name of Plugging Contractor: Allied Cementing License #: 6426
Address: P. O. Box 31 Russell, KS 67665
Name of Party Responsible for Plugging Fees: Ritchie Exploration, Inc.

State of Kansas County, Trego, ss.

Peter J. Fiorini - employee of Ritchie Exploration, Inc.

(Employee of Operator) or (Operator) on above-described well, being first duly sworn on oath, says: That I have knowledge of the facts statements, and matters herein contained, and the log of the above-described well is as filed, and the same are true and correct, so help me God.

(Signature) _____

(Address) P. O. Box 783188 Wichita, KS 67278-3188


SUBSCRIBED and SWORN TO before me this 10th day of December, 20 08

Ronda Messer

Notary Public

My Commission Expires: 5/7/12

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

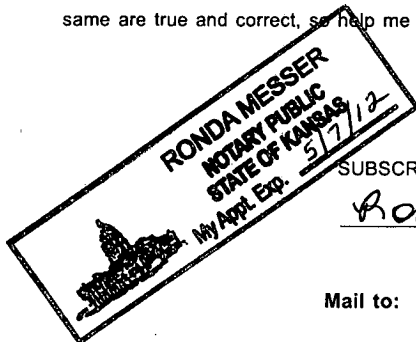

RECEIVED
KANSAS CORPORATION COMMISSION

DEC 11 2008

CONSERVATION DIVISION
WICHITA, KS

PRT

ALLIED CEMENTING CO., LLC. 043961

REMIT TO P.O. BOX 31
RUSSELL, KANSAS 67665.

SERVICE POINT: PARSONS

DATE <u>11-7-08</u>	SEC. <u>18</u>	TWP. <u>11</u>	RANGE <u>22</u>	CALLED OUT	ON LOCATION <u>10:30am</u>	JOB START <u>12:00pm</u>	JOB FINISH <u>1:00pm</u>
LEASE <u>Parson</u>	WELL# <u>1-B</u>		LOCATION <u>Wetmoreway 1st Rd W</u>		COUNTY <u>Trego</u>	STATE <u>KS</u>	
OLD OR NEW (Circle one)			<u>4 E. 5th 112 W 34 E</u>				

CONTRACTOR Express Well Service OWNER _____

TYPE OF JOB WUP

HOLE SIZE _____ T.D. _____

CASING SIZE 4 1/2 DEPTH _____

TUBING SIZE 2 7/8 DEPTH 3500

DRILL PIPE _____ DEPTH _____

TOOL _____ DEPTH _____

PRES. MAX _____ MINIMUM _____

MEAS. LINE _____ SHOE JOINT _____

CEMENT LEFT IN CSG. _____

PERFS. _____

DISPLACEMENT _____

CEMENT

AMOUNT ORDERED 350 60/40 4%

500# hulls

COMMON	<u>240</u>	@ <u>15.45</u>	<u>3244.50</u>
POZMIX	<u>140</u>	@ <u>8.00</u>	<u>1120.00</u>
GEL	<u>12</u>	@ <u>20.80</u>	<u>249.60</u>
CHLORIDE		@	
ASC		@	
Hulls	<u>500#</u>	@ <u>31.82</u>	<u>12790</u>
HANDLING	<u>367</u>	@ <u>2.40</u>	<u>880.80</u>
MILEAGE	<u>1085</u>	@ <u>2.05</u>	<u>2224.25</u>
TOTAL			<u>7824.30</u>

EQUIPMENT

PUMP TRUCK CEMENTER Rozzy

431 HELPER Alvin

BULK TRUCK

394 DRIVER Chuck Russell

BULK TRUCK

481 DRIVER John Russell

REMARKS:

Mix 125# cement 1500 hulls @ 3500

Mix 100# cement 500# hulls @ 2300' dir to surface

Tie on 4 1/2 pump 75# 30# hulls press to 500# shut in @ 350# mix 50# down backside 100# press shut in @ 75#

Job complete @ 1:00pm

Thanks Rozzy & crew

CHARGE TO: Petroleum Exploration

STREET _____

CITY _____ STATE _____ ZIP _____

SERVICE

DEPTH OF JOB 3500

PUMP TRUCK CHARGE 400

EXTRA FOOTAGE @ _____

MILEAGE @ 1085

MANIFOLD @ _____

TOTAL 400

PLUG & FLOAT EQUIPMENT

@ _____

@ _____

@ _____

@ _____

@ _____

TOTAL _____

To Allied Cementing Co., LLC.

You are hereby requested to rent cementing equipment and furnish cementer and helper(s) to assist owner or contractor to do work as is listed. The above work was done to satisfaction and supervision of owner agent or contractor. I have read and understand the "GENERAL TERMS AND CONDITIONS" listed on the reverse side.

PRINTED NAME _____

SIGNATURE Thome A. A.

SALES TAX (If Any) _____

TOTAL CHARGES _____

DISCOUNT _____ IF PAID IN 30 DAYS

RECEIVED
KANSAS CORPORATION COMMISSION
DEC 11 2008
CONSERVATION DIVISION
WICHITA, KS

TH