

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-187-20738-00-00
Spot: SESW Sec/Twnshp/Rge: 17-29S-39W
664 feet from S Section Line, 3253 feet from E Section Line
Lease Name: GEORGIA WELCH Well #: 1-17
County: STANTON Total Vertical Depth: 5850 feet

Operator License No.: 32309
Op Name: PRESCO WESTERN LLC
Address: 5665 FLATIRON PKWY
BOULDER, CO 80301

String	Size	Depth (ft)	Pulled (ft)	Comments
DVT		2986		WITH 450 SXCMT
PROD	5.5	5850	0	WITH 400 SX CMT
SURF	8.625	1850		WITH 765 SX CMT

190.13

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 12/02/2008 8:30 AM
Plug Co. License No.: 34069 Plug Co. Name: BASIC ENERGY SERVICES, LP
Proposal Rcvd. from: STEVE RIDENOUR Company: PRESCO WESTERN Phone: (303) 444-8881

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING REPORT

Plugging Proposal Received By: STEVE DURRANT Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 12/03/2008 12:30 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

CASING LEAKS BELOW 3478'. PUMP 50 SX CMT & 200# HULLS @ 5400'. NO CIRCULATION. SPOT 10 SX GEL & 200# HULLS @ 3440'. PARTIAL RETURNS. TAGGED FLUID LEVEL WITH SWAB. PLUG WENT DOWN HOLE 500'. SPOT 2ND 10 SX GEL & 200# HULLS PLUG. BETTER CIRCULATION. PULL TBG TO 3000' & SPOT 25 SX CMT. GOOD CIRCULATION. SDON. 12/3/08: TAG CMT PLUG WITH TBG @ 3074'. PULL TBG TO 3014' & SPOT 25 SX CMT. FULL CIRCULATION. PLUG AT 1880' WITH 40 SX CMT. PLUG AT 660-0' WITH 60 SX CMT IN 2 STAGES. PUMP 15 SX CMT DOWN 5 1/2 x 8 5/8" ANNULUS. PRESSURE TO 300# & HELD.

Perfs:

Top	Bot	Thru	Comments
5567	5574		
5520	5530		
5483	5492		

INVOICED
DATE 1-21-09
INV. NO. 2009061050

RECEIVED
KANSAS CORPORATION COMMISSION


DEC 24 2008

CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY BASIC ENERGY.

Plugged through: TBG

District: 01

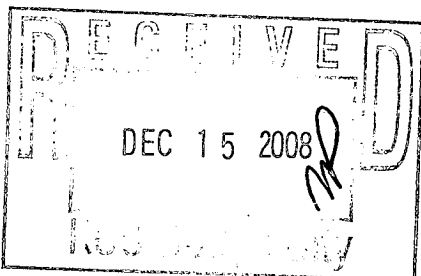

Signed

[Handwritten Signature]

(TECHNICIAN)

[Handwritten Initials]

[Handwritten Signature]