

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-187-20815-00-00
Spot: E2SESE Sec/Twnshp/Rge: 34-29S-40W
660 feet from S Section Line, 330 feet from E Section Line
Lease Name: AMBER MICHELLE Well #: 1-34
County: STANTON Total Vertical Depth: 5754 feet

Operator License No.: 32309
Op Name: PRESCO WESTERN LLC
Address: 5665 FLATIRON PKWY
BOULDER, CO 80301

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		3300		WITH 2 SX CMT
CIBP		5545		WITH 2 SX CMT
PROD	4.5	5714	0	
SURF		1589		

187-01

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 12/12/2008 9:00 AM
Plug Co. License No.: 34069 Plug Co. Name: BASIC ENERGY SERVICES, LP
Proposal Rcvd. from: STEVE RIDENOUR Company: PRESCO WESTERN Phone: (303) 444-8881

Proposed Plugging Method: CIBP @ 5550' WITH 2 SX CMT. CIBP @ 3300' WITH 2 SX CMT. PLUG AT 1620' WITH 15 SX GEL & 50 SX CMT. PLUG AT 600'. CIRCULATE CMT TO SURFACE. CHECK BACKSIDE WITH 50 SX CMT.

Plugging Proposal Received By: ERIC MACLAREN WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 12/12/2008 2:30 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

CASING LEAKS @ 3362-4176'. CIBP @ 5545' WITH 2 SX CMT. CIBP @ 3300' WITH 2 SX CMT. PUMP 35 SX CMT AT 1642' THROUGH TBG. FULL CIRCULATION. PERFORATED AT 600'. CIRCULATE 4 1/2" & 4 1/2" X 8 5/8" ANNULUS FULL OF CMT WITH 165 SX CMT.

Perfs:

Top	Bot	Thru	Comments
5595	5600		

INVOICED


DATE 1-21-09
INV. NO. 2009061050

RECEIVED
KANSAS CORPORATION COMMISSION
DEC 24 2008
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY BASIC CEMENTING.

Plugged through: TBG

District: 01

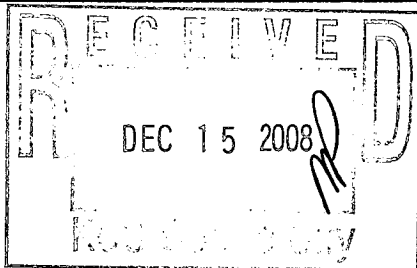

Signed

[Handwritten Signature]

(TECHNICIAN)