

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-135-24870-00-00
Spot: NWSWNE Sec/Twnshp/Rge: 7-17S-25W
1650 feet from N Section Line, 2310 feet from E Section Line
Lease Name: STUTZ G Well #: 2
County: NESS Total Vertical Depth: 4580 feet

Operator License No.: 6009
Op Name: DOUBLE EAGLE EXPLORATION, INC.
Address: 800 W 47TH ST STE 318
KANSAS CITY, MO 64112

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	207		WITH 165 SX CMT

148.85

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 12/30/2008 7:00 PM
Plug Co. License No.: 33575 Plug Co. Name: WW DRILLING, LLC
Proposal Rcvd. from: KIRBY STRUTT Company: WW DRILLING, LLC Phone: (785) 743-6774

Proposed Plugging Method: 1ST PLUG AT 1890' WITH 50 SX CMT. 2ND PLUG AT 1170' WITH 80 SX CMT. 3RD PLUG AT 600' WITH 50 SX CMT. 4TH PLUG AT 240' WITH 40 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 30 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 20 SX CMT.

Plugging Proposal Received By: ERIC MACLAREN WitnessType: NONE
Date/Time Plugging Completed: 12/30/2008 9:00 PM KCC Agent: ERIC MACLAREN

Actual Plugging Report:

1ST PLUG AT 1890' WITH 50 SX CMT. 2ND PLUG AT 1170' WITH 80 SX CMT. 3RD PLUG AT 600' WITH 50 SX CMT. 4TH PLUG AT 240' WITH 40 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 30 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 20 SX CMT.

Perfs:


RECEIVED
KANSAS CORPORATION COMMISSION
JAN 07 2009
CONSERVATION DIVISION
WICHITA, KS

INVOICED
DATE 1-23-09
INV. NO. 2009060067

Remarks: USED 60/40 POZMIX 4% GEL 1/4# FLO SEAL BY ALLIED.

Plugged through: DP

District: 01

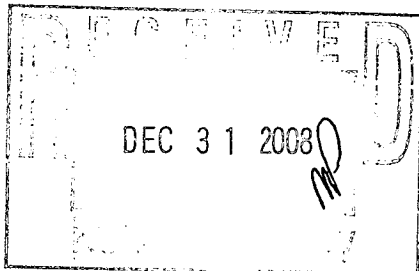

Signed Eric MacLaren
(TECHNICIAN)

Handwritten initials/signature