

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-175-22157-00-00  
Spot: N2SENESEW Sec/Twnshp/Rge: 26-34S-33W  
1690 feet from S Section Line, 2310 feet from W Section Line  
Lease Name: TRIMMELL Well #: 2-26  
County: SEWARD Total Vertical Depth: 6489 feet

Operator License No.: 5363  
Op Name: BEREXCO, INC.  
Address: PO BOX 20380  
WICHITA, KS 67208

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	1570		WITH 650 SX CMT

210.89

Well Type: DH UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 10/07/2008 8:00 AM  
Plug Co. License No.: 5147 Plug Co. Name: BEREDCO, INC.

Proposal Rcvd. from: \_\_\_\_\_ Company: \_\_\_\_\_ Phone: \_\_\_\_\_

Proposed Plugging Method: 1ST PLUG AT 1600' WITH 50 SX CMT. 2ND PLUG AT 680' WITH 40 SX CMT. 3RD PLUG AT 60' WITH 20 SX CMT. 4TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 5TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: MICHAEL MAIER WitnessType: NONE  
Date/Time Plugging Completed: 10/07/2008 5:00 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

1ST PLUG AT 1600' WITH 50 SX CMT. 2ND PLUG AT 680' WITH 40 SX CMT. 3RD PLUG AT 60' WITH 20 SX CMT. 4TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 5TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Perfs:


INVOICED  
DATE 1-15-09  
INV. NO. 2009060984

RECEIVED  
KANSAS CORPORATION COMMISSION  
DEC 15 2008  
CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: DP

District: 01

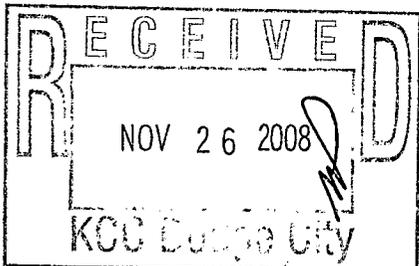

Signed

Michael Maier  
(TECHNICIAN)

Form CP-2/3

210.89