

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

KCC # 15-083-20506-00-00
Sew

API Well Number: 15-083-20506-00-00

Spot: NESW

Sec/Twnshp/Rge: 13-23S-22W

~~2010~~ ~~1980~~ feet from S Section Line, ~~3300~~ feet from E Section Line

Lease Name: KROPP

3313 Well #: 1

County: HODGEMAN

Total Vertical Depth: 4580 feet

Operator License No.: 30931

Op Name: DAYSTAR PETROLEUM, INC.

Address: 1321 W 93 N PO BOX 360
VALLEY CENTER, KS 67147

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	4410	0	WITH 300 SX CMT
SURF	8.625	329		WITH 250 SX CMT <u>148.85</u>

Well Type: OIL

UIC Docket No:

Date/Time to Plug: 11/18/2008 8:00 AM

Plug Co. License No.: 31627

Plug Co. Name: WHITETAIL CRUDE, INC

Proposal Rcvd. from: BILL BRINEY

Company: WHITETAIL CRUDE, INC

Phone: (785) 798-3641

Proposed
Plugging
Method:

SAND TO 4240' & 5 SX CMT. PLUG AT 1400' WITH 50 SX CMT. PLUG AT 650' WITH 80 SX CMT. PLUG AT 360' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: MICHAEL MAIER

Witness Type: COMPLETE (100%)

Date/Time Plugging Completed: 11/19/2008 10:30 AM

KCC Agent: MICHAEL MAIER

Actual Plugging Report:

SAND TO 4240' & 5 SX CMT. FL @ 1250'. PERFORATED AT 1400'. PUMP 25 SX CMT. WAIT 2 HOURS. TOC @ 1730'. PUMP INTO AND ESTABLISH RATE AT 4 1/2 BBLS @ 100#. PUMP 50 SX CMT. SDON. 11/19/08" RAN WIRE LINE FOUND CMT AT 1227'. PERFORATED @ 650'. PUMPED 150 SX CMT. CMT CIRCULATED TO SURFACE.

Perfs:

Top	Bot	Thru	Comments
4293	4313		


INVOICED
DATE 1-15-09
INV. NO. 2009060987

RECEIVED
KANSAS CORPORATION COMMISS-
DEC 15 2008
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY SWIFT SERVICES.

Plugged through: CSG

District: 01

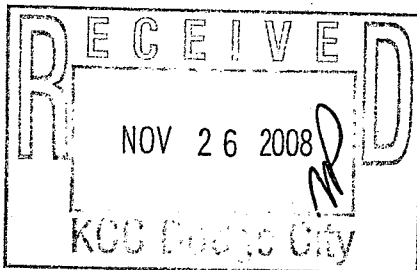

Signed

Michael Maier

(TECHNICIAN)

Form CP-2/3

PKT