

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-101-22142-00-00  
Spot: E2E2SE Sec/Twnshp/Rge: 30-19S-28W  
1485 feet from S Section Line, 330 feet from E Section Line  
Lease Name: PANZNER "B" Well #: 1-30  
County: LANE Total Vertical Depth: 4720 feet

Operator License No.: 9408  
Op Name: TRANS PACIFIC OIL CORPORATION  
Address: 100 S MAIN STE 200  
WICHITA, KS 67202

| String | Size  | Depth (ft) | Pulled (ft) | Comments        |
|--------|-------|------------|-------------|-----------------|
| SURF   | 8.625 | 252        |             | WITH 170 SX CMT |

153.40

Well Type: DH UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 11/24/2008 3:30 PM  
Plug Co. License No.: 5929 Plug Co. Name: DUKE DRILLING CO., INC.  
Proposal Rcvd. from: RICH WHEELER Company: DUKE DRILLING CO., INC. Phone: (316) 267-1331

Proposed Plugging Method: 1ST PLUG AT 2160' WITH 50 SX CMT. 2ND PLUG AT 1260' WITH 80 SX CMT. 3RD PLUG AT 630' WITH 50 SX CMT. 4TH PLUG AT 280' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. NO MOUSE HOLE.

Plugging Proposal Received By: LINDLEY REIMER WitnessType: NONE  
Date/Time Plugging Completed: 11/24/2008 5:30 PM KCC Agent: LINDLEY REIMER

Actual Plugging Report:

1ST PLUG AT 2160' WITH 50 SX CMT. 2ND PLUG AT 1260' WITH 80 SX CMT. 3RD PLUG AT 630' WITH 50 SX CMT. 4TH PLUG AT 280' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. NO MOUSE HOLE.

Perfs:


**INVOICED**  
DATE 1-15-09  
INV. NO. 2009061004

RECEIVED  
KANSAS CORPORATION COMMISSION  
**DEC 15 2008**  
CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL 1/4# FLO SEAL BY ALLIED.

Plugged through: DP

District: 01

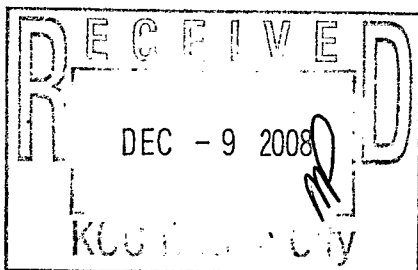

Signed \_\_\_\_\_

*[Handwritten Signature]*  
(TECHNICIAN)