

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-097-21542-00-00  
Spot: NESESWSE Sec/Twnshp/Rge: 9-29S-18W  
400 feet from S Section Line, 1520 feet from E Section Line  
Lease Name: DARGEL Well #: 2  
County: KIOWA Total Vertical Depth: 4908 feet

Operator License No.: 32781  
Op Name: ROBERTS RESOURCES, INC.  
Address: 520 S HOLLAND STE 207  
WICHITA, KS 67209

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	4902	2624	WITH 175 SX CMT
SURF	8.625	643		WITH 275 SX CMT

159.51

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 12/19/2008 9:00 AM  
Plug Co. License No.: 34069 Plug Co. Name: BASIC ENERGY SERVICES, LP  
Proposal Rcvd. from: EDGAR SANCHEZ Company: ROBERTS RESOURCES Phone: (316) 733-2281

Proposed Plugging Method: CIBP @ 4850' & 2 SX CMT. PLUG AT 1190' WITH 15 SX GEL & 50 SX CMT. PLUG AT 660' WITH 50 SX CMT. PLUG AT 60' WITH 20 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: NONE  
Date/Time Plugging Completed: 12/19/2008 11:20 AM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SET CIBP @ 4850' & 2 SX CMT. SPOTTED PLUGS THROUGH CASING. 1ST PLUG AT 1190' WITH 15 SX GEL & 50 SX CMT. 2ND PLUG AT 660' WITH 50 SX CMT. 3RD PLUG AT 60' WITH 20 SX CMT.

Perfs:

Top	Bot	Thru	Comments
4902	4908		

**INVOICED**

DATE 1-23-09  
INV. NO. 2009061083

RECEIVED  
KANSAS CORPORATION COMMISSION


JAN 02 2009

CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY BASIC ENERGY.

Plugged through: CSG

District: 01

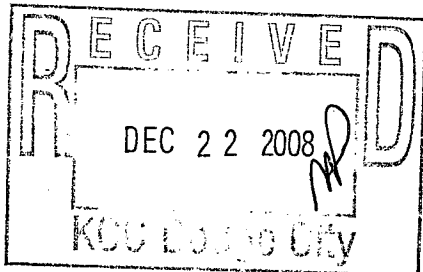

Signed

Stephen Pfeifer  
(TECHNICIAN)

Form CP-23

Plas