

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-097-21530-00-00  
Spot: SWNENE Sec/Twnshp/Rge: 9-29S-18W  
1060 feet from N Section Line, 960 feet from E Section Line  
Lease Name: MCKINLEY Well #: 2  
County: KIOWA Total Vertical Depth: 5050 feet

Operator License No.: 32781  
Op Name: ROBERTS RESOURCES, INC.  
Address: 520 S HOLLAND STE 207  
WICHITA, KS 67209

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		4800		WITH 2 SX CMT
CIBP		4968		
PROD 4.5		5047	2511	WITH 175 SX CMT <u>164.13</u>
SURF 8.625		558		WITH 275 SX CMT

Well Type: OG UIC Docket No: 331645 Date/Time to Plug: 12/17/2008 10:15 AM  
Plug Co. License No.: 4072 Plug Co. Name: H2 Plains LLC KCC Per Licensing  
Proposal Rcvd. from: EDGAR SANCHEZ Company: ROBERTS RESOURCES Phone: (316) 721-2817

Proposed Plugging Method: CIBP @ 4800' WITH 2 SX CMT. PLUG AT 1260' WITH 15 SX GEL & 50 SX CMT. PLUG AT 580' WITH 50 SX CMT. PLUG AT 60' WITH 20 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 12/17/2008 3:00 PM KCC Agent: ERIC MACLAREN

Actual Plugging Report:

SET CIBP @ 4800' WITH 2 SX CMT. 1ST PLUG AT 1260' WITH 15 SX GEL & 50 SX CMT. HAD GOOD RETURNS BUT PIPE WAS STUCK IN HOLE. CIRCULATED HOLE WITH WATER WHILE WORKING PIPE. STRETCH CALCUALTED FREE POINT @ APPROX. 1000'. SET ANOTHER 50 SX CMT PLUG @ 1260'. WAITED ON TRUCKS. PIPE FREED UP. 2ND PLUG @ 580' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT. CMT CIRCULATED.

Perfs:

Top	Bot	Thru	Comments
4974	4978		
4953	4957		
4860	4864		
4848	4852		

**INVOICED**

DATE 1-22-09  
INV. NO. 2009061057

RECEIVED  
KANSAS CORPORATION COMMISSION


DEC 24 2008

CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY BASIC ENERGY SERVICES.

Plugged through: CSG

District: 01

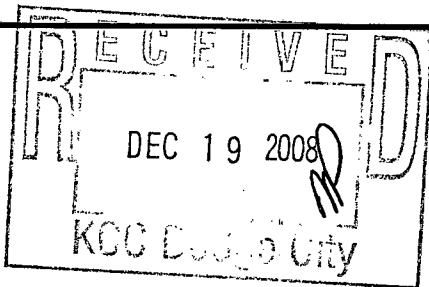

Signed Eric MacLaren  
(TECHNICIAN)

PKT  
Form 21-23