

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION

Form CP-1
September 2003
Form must be Typed
Form must be Signed
All blanks must be Filled

WELL PLUGGING APPLICATION

Please TYPE Form and File ONE Copy

API # 15- 129-21792-0000 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued.

Indicate original spud or completion date 7/24/2007

Well Operator: Presco Western, LLC KCC License #: 32309
(Owner/Company Name) (Operator's)

Address: 5665 Flatiron Parkway City: Boulder

State: CO Zip Code: 80301 Contact Phone: 303 305-1163

Lease: Dos Reatas Well #: 5-E26-3240 Sec. 26 Twp. 32 R. 40 East West

SW - SW - NW - Spot Location/QQQQ County Morton

2.310 Feet from (in exact footage) North / South (from nearest outside section corner) Line of Section (not Lease Line)

330 Feet from (in exact footage) East / West (from nearest outside section corner) Line of Section (not Lease Line)

Check One: Oil Well Gas Well D&A Cathodic Water Supply Well
 SWD Docket # _____ ENHR Docket # _____ Other _____

Conductor Casing Size: N/A Set at: _____ Cemented with: _____ Sacks

Surface Casing Size: 8-5/8" Set at: 1,578' Cemented with: 725 Sacks

Production Casing Size: 4-1/2" Set at: 5,986' Cemented with: 350 Sacks

List (ALL) Perforations and Bridgeplug Sets: Perfs 5372-86/5441-58/5508-24/5614-20

Elevation: 3,304 (G.L. K.B.) T.D. 5,982' PBDT 5,430 Anhydrite Depth _____
(Stone Corral Formation)

Condition of Well: Good Poor Casing Leak Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): Plug 1: CIBP @ 5.300' w/ 2 SKS cmt.

Plug 2: 40 SKS 60/40 POZ CMT @ 1,650'. Plug 3: 60 SKS 60/40 POZ CMT @ 600'.

Plug 4: Tie onto surface ssq and with w/ cmt to surface.

RECEIVED
KANSAS CORPORATION COMMISSION

Is Well Log attached to this application as required? Yes No Is ACO-1 filed? Yes No

DEC 22 2008

If not explain why? _____
CONSERVATION DIVISION
WICHITA, KS

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission

List Name of Company Representative authorized to be in charge of plugging operations:

Kelly Tompkins 620-655-1958 Kevin Newman 620-309-3413 Phone: 620 952-2403

Address: 303 S. Stubbs Rd. City/State Ulysses/KS

Plugging Contractor to be determined KCC License # _____
(Company Name) (Contractor's)

Address _____ Phone: _____

Proposed Date and Hour of Plugging (if known?): 12/29/2008

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: _____ Authorized Operator / Agent: Keli Kowalski

(Signature)


Keli Kowalski

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

Dust
PK

DOS REATAS 5-E26-32-40
15-129-21792

12/29/08

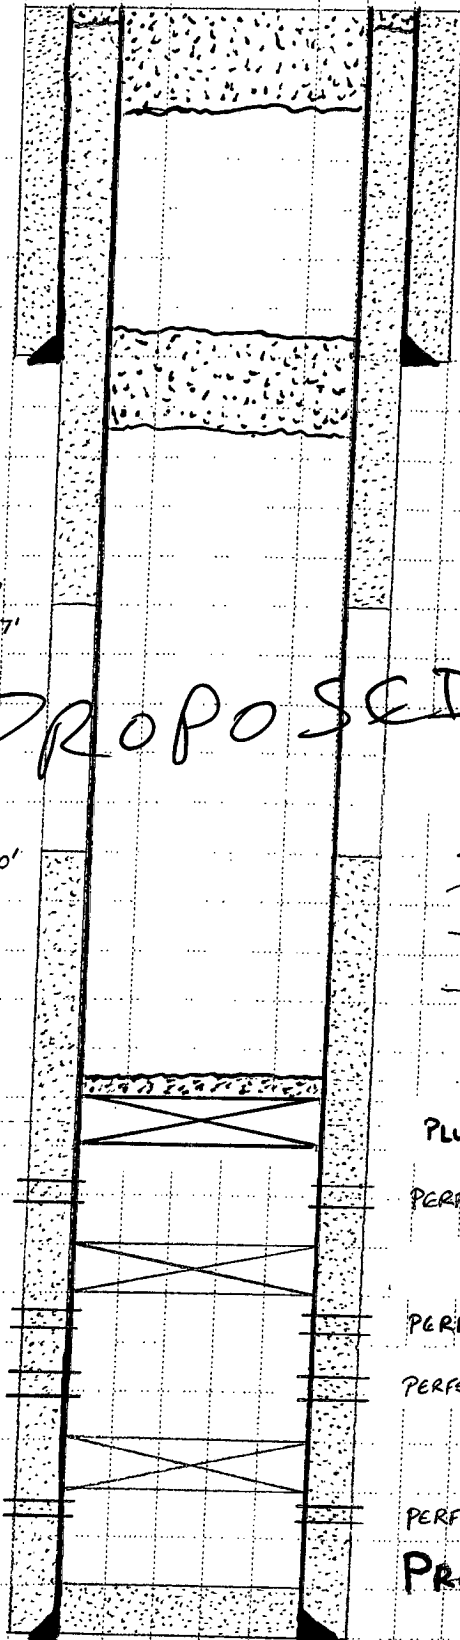

PLUG #4 TIE ONTO SURFACE CASING AND
FILL W/ CMT TO SURFACE

PLUG #3 60 SXS 60/40 POZ CMT @ 600'

SURFACE CSG

8 5/8" 24# J-55 @ 1,578'

PLUG #2 40 SXS 60/40 POZ CMT @ 1,650'

1,578'

DV TOOL @ 3,033'
CMT'D FROM 3,037'
TO SURFACE

PROPOSED

4,000'

- Tie onto surface and fill to surface
- 600 to surface in CSG
- 1,650' 40 SXS
- CIBP @ 5,300' + 2 SXS CMT

PLUG #1 CIBP @ 5,300' w/ 2 SXS CMT

PERFS 5,372' - 5,386' (MORROW)

PERFS 5,441' - 5,458' (MORROW)

PERFS 5,508' - 5,524' (MORROW)

PERFS 5,614' - 5,620' (ST. LOUIS)

PRODUCTION CSG

4 1/2" 10.5# K-55 @ 5,982'

RECEIVED
KANSAS CORPORATION

DEC 22 2008

CONSERVATION DIVISION
WICHITA, KS



CORPORATION COMMISSION

Kathleen Sebelius, Governor Thomas E. Wright, Chairman Michael C. Moffet, Commissioner Joseph F. Harkins, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

PRESCO WESTERN LLC
5665 FLATIRON PKWY
BOULDER, CO 80301

January 02, 2009

Re: DOS REATAS #5-E26-32-40
API 15-129-21792-00-00
26-32S-40W, 2310 FNL 330 FWL
MORTON COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division has received your plugging proposal, form CP-1, for the above well and has reviewed the proposal for completeness. The central office will now forward your CP-1 to the district office listed below for review of the proposed plugging method. **Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113(b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit in accordance with K.A.R. 82-3-600.**

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well. This notice in no way constitutes authorization to plug the above well by persons not having legal rights of ownership or interest in the well.

This notice is void after July 1, 2009. The CP-1 filing does not bring the above well into compliance with K.A.R. 82-3-111 with regard to the Commission's temporary abandonment requirements.

Sincerely,

Steve Bond
Production Department Supervisor

District: #1
210 E Frontview, Suite A
Dodge City, KS 67801
(620) 225-8888