


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Ellis County, Sec. 5 Twp. 11S Rge. (E) 16 (W)

Location as "NE/CNW&SW&E" or footage from lines C E/2 NW NE
Lease Owner Pickrell Drilling Company
Lease Name Craig "C" Well No. 1
Office Address 705 Fourth National Bank Bldg., Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed August 12 19 67
Application for plugging filed August 12 19 67
Application for plugging approved August 12 19 67
Plugging commenced August 12 19 67
Plugging completed August 12 19 67
Reason for abandonment of well or producing formation Dry Hole

NORTH



Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey, P. O. Box 582, Hays, Kansas 67601
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3688 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	241'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Heavy mud to 600'. Set plug. Cemented with
90 sacks cement. Heavy mud to 240'. Set plug.
Cemented with 25 sacks cement. Heavy mud to 40'.
Set plug. Cemented with 10 sacks cement to bottom
of cellar. Plugged rat hole with 2 sacks cement.

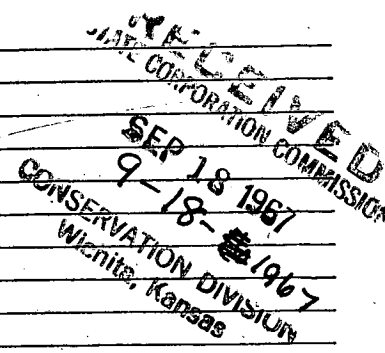

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Pickrell Drilling Company
Address 705 Fourth National Bank Bldg., Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick, ss.

C. W. Sebitts (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. W. Sebitts
705 4th Nat'l Bank Bldg., Wichita, Ks. 67202
(Address)

SUBSCRIBED AND SWORN to before me this 24th day of August, 19 67

My commission expires May 10, 1970

L. M. Whiting
Notary Public.

ROTARY DRILLING LOG 15-051-20102-00-00

COMPANY: Pickrell Drilling Company
 705 Fourth National Bank Bldg.
 Wichita, Kansas 67202

Rotary Drilling Commenced 8/2/67

Rotary Drilling Completed 8/12/67

LOCATION: Craig "C" No. 1
 C E/2 NW NE Section 5-11S-16W
 Ellis County, Kansas

CONTRACTOR: **PICKRELL DRILLING COMPANY**
 Wichita, Kansas

CASING RECORD: (11 jts.) 8 5/8" surface casing set at 241' and cemented with 150 sacks of cement. Circulated. Complete 7:45 PM, August 2, 1967. No oil string was run. D. & A., plugged 6:30 AM, August 12, 1967.

LOG

(Figures indicate bottom of formation — measurements from top of rotary bushing.)

45	Post Rock	C. F. S.
241	Shale & Sand Streaks	3042
475	Shale & Shells	3438
575	Sand	3522
800	Shale & Shells	3572
1165	Red Beds, Shale & Shells	3585 3590
1247	Shale	3595
1284	Anhydrite	3659
1495	Shale	
2005	Lime & Shale	
2165	Lime	Slope Tests
2305	Lime & Shale	2500
2370	Lime	3000
3090	Lime & Shale	3500
3157	Lime	
3225	Lime & Shale	
3530	Lime	
3590	Lime & Sand	S. L. M.
3595	Sand	2837'
3688	Lime & Chert, RTD	

RECEIVED
 STATE CORPORATION COMMISSION
 SEP 18 1967
 9-18-1967
 CONSERVATION DIVISION
 Wichita, Kansas

The undersigned, C. W. Sebitts, Attorney-in-Fact for PICKRELL DRILLING COMPANY, hereby certifies in behalf of said Company, that the above is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.

PICKRELL DRILLING COMPANY
 By [Signature]
 C. W. Sebitts, Attorney-in-Fact

STATE OF KANSAS }
 COUNTY OF SEDGWICK } ss.:

On this 24th day of August, 19 67, before me the undersigned, a Notary Public, in and for the County and State aforesaid, personally appeared C. W. Sebitts, to me known to be the identical person who subscribed the name of PICKRELL DRILLING COMPANY to the foregoing instrument as its Attorney-in-Fact and acknowledged to me that he executed the same as his free and voluntary act and deed, and as the free and voluntary act and deed of such company, for the uses and purposes therein set forth.

Given under my hand and seal of office the day and year last above written.

My commission expires: May 10, 1970

[Signature]
 Notary Public
 L. M. Whiting