

15-051-00026-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

Ellis County. Sec. 11 Twp. 11 Rge. (E) 16 (W)

Location as "NE/CNW/SW" or footage from lines NW/4 NW/4 SE/4

Lease Owner J. H. Johnson

Lease Name Albrecht Well No. 1

Office Address Kansas City, Missouri

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed August 11 19 52

Application for plugging filed August 11 19 52

Application for plugging approved August 11 19 52

Plugging commenced August 11 19 52

Plugging completed August 12 19 52

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well E. R. Petty, Hays, Kansas

Producing formation Depth to top Bottom Total Depth of Well 3705 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	200'	none
				(cemented top to bottom)		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 3705 feet to 0 feet for each plug set.

Filled Hole with heavy rotary mud to 200'

Run 5' rock bridge

Placed 1/2 sack Hulls on rock bridge.

Mixed & run 15 sacks of cement

Filled hole with heavy rotary mud to 40'.

Run 5' rock bridge

Placed 1/2 Sack hulls on rock bridge.

Mixed & run 10 sacks cement to top of casing.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Stearns Petroleum Inc.  
Address Russell, Kansas

STATE OF Kansas COUNTY OF Russell  
O. G. Stearns (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) *O. G. Stearns*  
Russell, Kansas  
(Address)

Subscribed and sworn to before me this 13th day of August 19 52  
June 20, 1953  
My commission expires

*Harold Albrecht*  
Notary Public.



PLUGGING  
FILE SEC 11 T 11 R 16  
BOOK PAGE 38 LINE 2

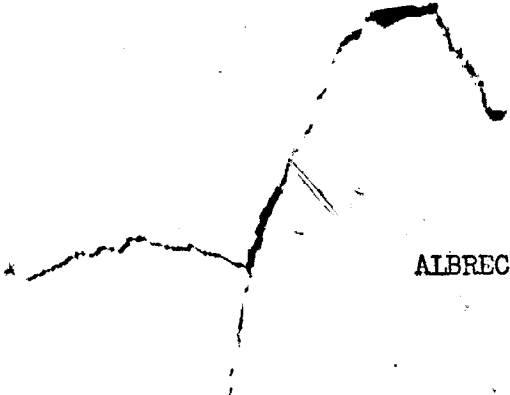

ALBRECHT #1

Operator: J. H. Johnson  
Contractor: Stearns Petroleum, Inc.  
Commencement Date: July 16, 1952  
Completion Date: August 12, 1952

Location: NW/4 NW/4 SE/4  
Section 11, Township 11 South  
Range 16 West, Ellis County,  
Kansas

Elevation: 1913 D. F.

Casing Record:  
8-5/8" 200, 21 cemented with 100 sacks

WELL LOG

Surface Clay	0	40
Sand and Clay	40	200
Shale and Sand	200	380
Red Bed and Shale	380	600
Shale	600	740
Sand and Shale	740	940
Red Bed and Shale	940	1105
Anhydrite	1105	1143
Red Bed & Shale	1143	1160
Shale and Shells	1160	1824
Shale and Lime	1824	3162
Lime	3162	3305
Lime and Shale	3305	3403
Lime	3403	3455
Lime and Shale	3455	3530
Conglomerate	3530	3670
Arbuckle	3670	3705
Total Depth	3705	

STATE OF KANSAS )  
COUNTY OF RUSSELL) ss


I hereby certify that the above information is true and correct to the best of my knowledge.

*[Signature]*

SUBSCRIBED AND SWORN to before me this 13th day of August, 1952.

*[Signature]*  
Notary Public

My Commission Expires: June 30, 1953



8-15-1952  
CONSERVATION DEPARTMENT  
Wichita, Kansas

**PLUGGING**  
FILE SEC 11T-11R-116W  
BOOK PAGE 38 LINE 2