

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-033-21479-00-00
Spot: S2S2SE Sec/Twnshp/Rge: 10-31S-17W
330 feet from S Section Line, 1440 feet from E Section Line
Lease Name: SHANE YOST Well #: 1
County: COMANCHE Total Vertical Depth: 5380 feet

Operator License No.: 33168
Op Name: WOOLSEY OPERATING COMPANY, LL
Address: 125 N MARKET STE 1000
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
COND	20	66		WITH 10.5 YDS CMT
PROD	4.5	5368	3640	WITH 160 SX CMT <u>174.85</u>
SURF	10.75	285		WITH 250 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 11/25/2008 8:00 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 727-3410

Proposed Plugging Method: CIBP @ 4900' WITH 2 SX CMT. PLUG AT 1000' WITH 15 SX GEL & 50 SX CMT. PLUG AT 315' WITH 75 SX CMT. PLUG AT 60' WITH 30 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 11/25/2008 11:00 AM KCC Agent: LINDLEY REIMER

Actual Plugging Report:

PUMPED 100# HULLS & 25 SX CMT. TAGGED CMT AT 4380'. 1ST PLUG AT 990' WITH 15 SX GEL & 50 SX CMT. 2ND PLUG AT 310' WITH 75 SX CMT. 3RD PLUG AT 40' WITH 25 SX CMT.

Perfs:

Top	Bot	Thru	Comments
4997	5016		MISSISSIPPIAN

INVOICED

DATE 12-23-08

INV. NO. 2009060915

RECEIVED
KANSAS CORPORATION COMMISSION


DEC 03 2008

CONSERVATION DIVISION
WICHITA, KS

Remarks: USAED 60/40 POZMIX 4% GEL BY QUALITY OILWELL CEMENTING.

Plugged through: CSG

District: 01

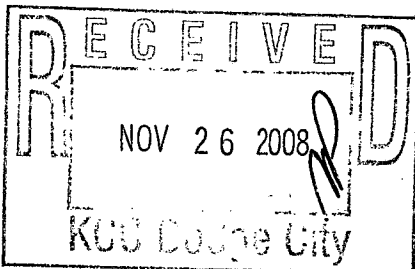

Signed _____

(TECHNICIAN)