

TO:
 STATE CORPORATION COMMISSION
 CONSERVATION DIVISION - PLUGGING
 130 SOUTH MARKET, SUITE 2078
 WICHITA, KANSAS 67202

KCC PRT PER OPS

API Well Number: 15-135-24448-00-00
 Spot: E2NW Sec/Twnshp/Rge: 18-19S-23W
~~4013~~ 1310 feet from N Section Line, 2640 feet from E Section Line
 Lease Name: KERR-ROTHE 2707 Well #: 1-18
 County: NESS Total Vertical Depth: 4360 feet

Operator License No.: 9855
 Op Name: GRAND MESA OPERATING COMPANY
 Address: 1700 N WATERFRONT PKWY BLDG 600
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comments
PC		1476		
PROD	5.5	4359	0	WITH 150 SX CMT
SURF	8.625	217		WITH 160 SX CMT

141-70

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 11/26/2008 2:00 PM
 Plug Co. License No.: 32382 Plug Co. Name: SWIFT SERVICES, INC.
 Proposal Rcvd. from: JOHN JOHNSON Company: GRAND MESA OPERATING Phone: (316) 265-3000

Proposed Plugging Method: CMT & HULLS ON BOTTOM. GEL SPACER TO ANHYDRITE. CMT TO SURFACE. 50 SX CMT FOR BACKSIDE.

Plugging Proposal Received By: MICHAEL MAIER Witness Type: COMPLETE (100%)
 Date/Time Plugging Completed: 11/26/2008 4:30 PM KCC Agent: MICHAEL MAIER

Actual Plugging Report:

PUMP 40 SX CMT & 200# HULLS, THEN 19 SX GEL MIXED WITH WATER THEN 145 SX CMT. MAXIMUM PRESSURE 2500#. SHUT IN PRESSURE 1500#. TIED ONTO BACKSIDE & PUMPED 10 SX CMT. PRESSURED TO 500# & HELD.

Perfs:

Top	Bot	Thru	Comments
4268	4272		
4264	4268		
4254	4257		
4244	4249		


INVOICED
 DATE 1-9-09
 INV. NO. 2009060906
 RECEIVED
 KANSAS CORPORATION COMMISSION
 JAN 09 2009

Remarks: USED 60/40 POZMIX 4% GEL BY SWIFT SERVICES.

Plugged through: CSG

CONSERVATION DIVISION
 WICHITA, KS

District: 01

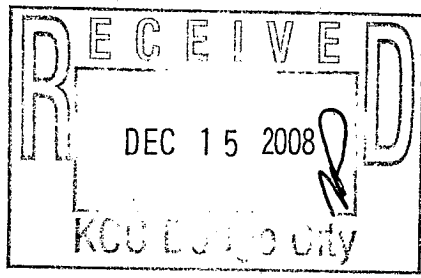

Signed Michael Maier
 (TECHNICIAN)

[Handwritten signature]