

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-101-22135-00-00
Spot: N2NENESE Sec/Twnshp/Rge: 21-18S-29W
2390 feet from S Section Line, 330 feet from E Section Line
Lease Name: GAIL STANLEY UNIT Well #: 1-21
County: LANE Total Vertical Depth: 4650 feet

Operator License No.: 31783
Op Name: MID-CONTINENT ENERGY OPERATING
Address: 100 W 5TH ST STE 450
TULSA, OK 74103

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	314		WITH 185 SX CMT

151.13

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 11/30/2008 2:30 AM
Plug Co. License No.: 5822 Plug Co. Name: VAL ENERGY, INC.
Proposal Rcvd. from: ED DOUGLAS Company: VAL ENERGY, INC. Phone: (316) 263-6688

Proposed Plugging Method: 1ST PLUG AT 2160' WITH 50 SX CMT. 2ND PLUG AT 1380' WITH 80 SX CMT. 3RD PLUG AT 690' WITH 50 SX CMT. 4TH PLUG AT 360' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: ERIC MACLAREN WitnessType: NONE
Date/Time Plugging Completed: 11/30/2008 4:30 AM KCC Agent: ERIC MACLAREN

Actual Plugging Report:

1ST PLUG AT 2160' WITH 50 SX CMT. 2ND PLUG AT 1380' WITH 80 SX CMT. 3RD PLUG AT 690' WITH 50 SX CMT. 4TH PLUG AT 360' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Perfs:


INVOICED
DATE 1-8-09
INV. NO. 2009060952

RECEIVED
KANSAS CORPORATION COMMISSION
DEC 08 2008
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL 1/4# FLO SEAL BY ALLIED.

Plugged through: DP

District: 01

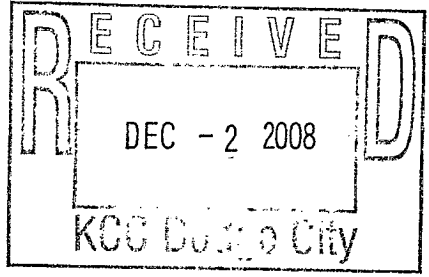

Signed Eric MacLaren
(TECHNICIAN)

Form CP-2/3
[Handwritten signature]