

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-007-20963-00-00  
Spot: NENESE Sec/Twnshp/Rge: 11-32S-12W  
2310 feet from S Section Line, 330 feet from E Section Line  
Lease Name: SMITH Well #: 1  
County: BARBER Total Vertical Depth: 4325 feet

Operator License No.: 33168  
Op Name: WOOLSEY OPERATING COMPANY, LLC  
Address: 125 N MARKET STE 1000  
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	4323	2770	WITH 75 SX CMT
SURF	8.625	214		WITH 185 SX CMT <b>140.56</b>

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 11/20/2008 2:00 PM  
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.  
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 727-3410

Proposed Plugging Method: PUMP 200# HULLS & 20 SX CMT. PLUG AT 600' WITH 10 SX GEL & 50 SX CMT. PLUG AT 240' WITH 50 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 11/20/2008 3:30 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

PUMPED 200# HULLS & 20 SX CMT DOWN 4 1/2" CASING. TAG TOP OF CMT AT 3830'. 1ST PLUG AT 600' WITH 10 SX GEL & 50 SX CMT WITH 50# HULLS. 2ND PLUG AT 240' WITH 50 SX CMT WITH 50# HULLS. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:

Top	Bot	Thru	Comments
4230	4250		


**INVOICED**  
DATE 1-9-09  
INV. NO. 2009060964

RECEIVED  
KANSAS CORPORATION COMMISSION  
DEC 08 2008  
CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL 3% CC BY QUALITY OILWELL CEMENTING.

Plugged through: CSG

District: 01

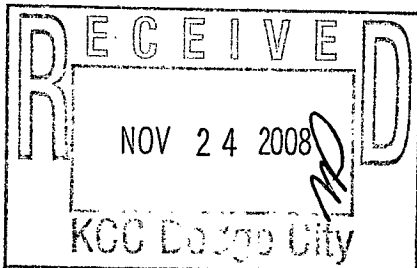

Signed

*Stephen J. Pfeifer*  
(TECHNICIAN)

Form CP-2/3

*PKT*