

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-007-21506-00-00  
Spot: S2S2NE Sec/Twnshp/Rge: 11-32S-12W  
2970 feet from S Section Line, 1320 feet from E Section Line  
Lease Name: SMITH Well #: 4  
County: BARBER Total Vertical Depth: 4662 feet

Operator License No.: 33168  
Op Name: WOOLSEY OPERATING COMPANY, LL  
Address: 125 N MARKET STE 1000  
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	4323	2750	WITH 75 SX CMT
SURF	8.625	390		WITH 295 SX CMT <u>151.52</u>

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 11/19/2008 8:30 AM  
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.  
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 727-3410

Proposed Plugging Method: PLUGGING PROPSAL SAME AS ACTUAL PLUGGING REPORT

Plugging Proposal Received By: STEVE PFEIFER WitnessType: NONE  
Date/Time Plugging Completed: 11/19/2008 10:00 AM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

PUMP 25 SX CMT & 200# HULLS ON BOTTOM. TAGGED PLUG AT 3100'. 1ST PLUG AT 600' WITH 15 SX GEL & 50 SX CMT WITH 100# HULLS. 2ND PLUG AT 420' WITH 50 SX CMT WITH 100# HULLS. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:

Top	Bot	Thru	Comments
4244	4270		
3510	3518		

**INVOICED**

DATE 1-9-09

INV. NO. 2009060964

RECEIVED  
KANSAS CORPORATION COMMISSION


DEC 08 2008

CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL 3% CC BY QUALITY OILWELL CEMENTING.

Plugged through: CSG

District: 01

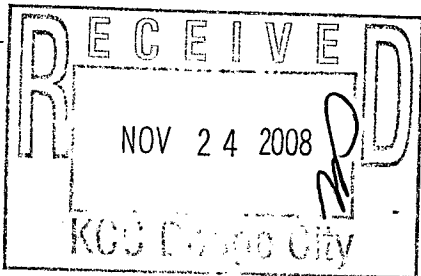

Signed

*Stephen J Pfeifer*  
(TECHNICIAN)

Form CP-2/3

PKT