

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-007-19038-00-00
Spot: NESWSE Sec/Twnshp/Rge: 7-33S-12W
961 feet from S Section Line, 1687 feet from E Section Line
Lease Name: ALEXANDER A Well #: 1
County: BARBER Total Vertical Depth: 4504 feet

Operator License No.: 8061
Op Name: OIL PRODUCERS INC. OF KANSAS
Address: 1710 WATERFRONT PKWY
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	4504	0	WITH 200 SX CMT
SURF	8.625	481		

14/6.38

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 12/30/2008 11:10 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: DAVID BRADY Company: QUALITY WELL SERVICE, INC. Phone: (620) 727-3410

Proposed Plugging Method: SAND BACK PERFS & CAP W/5 SX CMT. FILL 5 1/2" WITH CMT FROM 600-0'. TRY TO PUMP DOWN BACKSIDE WITH 100-150 SX CMT.

Plugging Proposal Received By: KEN JEHLIK WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 12/30/2008 11:50 AM KCC Agent: RICHARD LACEY

Actual Plugging Report:

SQUEEZED @ 698-720' WITH 150 SX CMT. SANDED TO 4380' & 5 SX CMT. RAN TBG TO 600'. PUMPED 75 SX CMT DOWN TBG, CIRCULATING TO SURFACE UP 5 1/2". PULLED TBG & TOPPED OFF 5 1/2" WITH 10 SX CMT. PUMPED 3 SX CMT DOWN 8 5/8" X 5 1/2" ANNULUS. BLEW HOLE IN 8 5/8".

Perfs:

Top	Bot	Thru	Comments
4440	4476		

INVOICED


DATE 1-27-09
INV. NO. 2009061119

RECEIVED
KANSAS CORPORATION COMMISSION
JAN 15 2009
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY QUALITY OIL WELL CEMENTING.

Plugged through: TBG

District: 01

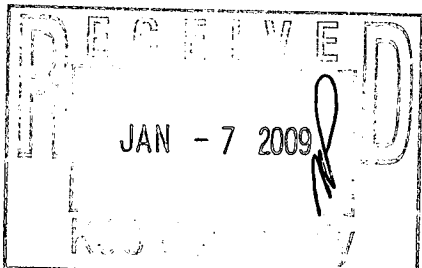

Signed Richard W. Lacey
(TECHNICIAN)