

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-20808-00-01
Spot: N2SENE Sec/Twnshp/Rge: 15-24S-14W
3630 feet from S Section Line, 660 feet from E Section Line
Lease Name: MORRIS Well #: 2
County: STAFFORD Total Vertical Depth: 4250 feet

Operator License No.: 5030
Op Name: VESS OIL CORPORATION
Address: 1700 WATERFRONT PKWY BLDG 500
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	4245	2070	WITH 125 SX CMT
SURF	8.625	265		WITH 210 SX CMT 138.13

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 12/31/2008 10:00 AM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.

Proposal Rcvd. from: MIKE KELSO Company: _____ Phone: (620) 938-2537

Proposed Plugging Method: SAND TO 3960' & 4 SX CMT. PLUG AT 1980' WITH 50 SX CMT. PLUG AT 900' WITH 15 SX GEL & 50 SX CMT. PLUG AT 300' WITH 50 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: RICHARD LACEY WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 12/31/2008 2:00 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

SANDED TO 3960' & 4 SX CMT. SPOTTED PLUGS THROUGH CASING. 1ST PLUG AT 1980' WITH 50 SX CMT DUE TO GAS. 2ND PLUG AT 900' WITH 15 SX GEL - 50 SX CMT. 3RD PLUG AT 300' WITH 50 SX CMT. 4TH PLUG AT 40' WITH 20 SX CMT.

Perfs:

Top	Bot	Thru	Comments
4120	4144		VIOLA
4022	4028		MISS
4016	4020		MISS

INVOICED
DATE 1-28-09
INV. NO. 2009061128

RECEIVED
KANSAS CORPORATION COMMISSION


JAN 15 2009

CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY COPELAND ACID.

Plugged through: CSG

District: 01

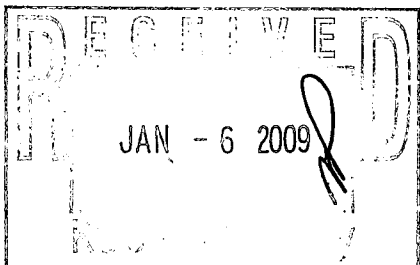

Signed

Richard W. Lacey
(TECHNICIAN)

Form CP-28

PKT