

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-185-21418-00-00  
Spot: SESWNE Sec/Twnshp/Rge: 15-24S-14W  
2310 feet from N Section Line, 1650 feet from E Section Line  
Lease Name: MORRIS Well #: 1  
County: STAFFORD Total Vertical Depth: 4250 feet

Operator License No.: 5030  
Op Name: VESS OIL CORPORATION  
Address: 1700 WATERFRONT PKWY BLDG 500  
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	4147	2015	WITH 150 SX CMT
SURF	8.625	267		WITH 200 SX CMT <b>138.13</b>

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 12/29/2008 3:00 PM  
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.  
Proposal Rcvd. from: MIKE KELSO Company: MIKE'S TESTING & SALVAGE, INC. Phone: (620) 938-2537

Proposed Plugging Method: SAND TO 3790' WITH 4 SX CMT. PLUG AT 900' WITH 50 SX CMT. PLUG AT 300' WITH 70 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: LINDLEY REIMER WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 12/29/2008 3:35 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

SAND TO 3790' & 4 SX CMT. 1ST PLUG AT 914' WITH 15 SX GEL - 50 SX CMT. 2ND PLUG AT 300' WITH 70 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:

Top	Bot	Thru	Comments
4017	4024		SQZ MISS
3843	3850		KC


INVOICED  
DATE 1-28-09  
INV. NO. 2009061128

RECEIVED  
KANSAS CORPORATION COMMISSION  
JAN 15 2009  
CONSERVATION DIVISION  
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY COPELAND.

Plugged through: CSG

District: 01

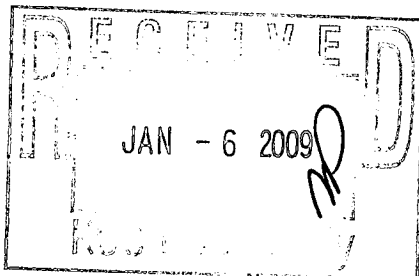

Signed

Richard W. Lacey  
(TECHNICIAN)