

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-189-00178-00-00
Spot: NE Sec/Twnshp/Rge: 23-31S-35W
3960 feet from S Section Line, 1320 feet from E Section Line
Lease Name: ROLAND UNIT Well #: 3
County: STEVENS Total Vertical Depth: 2705 feet

Operator License No.: 5208
Op Name: EXXONMOBIL OIL CORP
Address: 14950 HEATHROW FORREST PKWY P
HOUSTON, TX 77210

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	2702	0	WITH 375 SX CMT
SURF	8.625	604		WITH 300 SX CMT

87.91

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 01/09/2009 9:00 AM
Plug Co. License No.: 31151 Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.
Proposal Rcvd. from: DON HORTON Company: SARGENT AND HORTON PLUGGIN Phone: (580) 854-6515

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING.

Plugging Proposal Received By: STEVE DURRANT Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 01/09/2009 2:30 PM KCC Agent: JACK MACLASKEY

Actual Plugging Report:

TBG & RODS STUCK IN WELL. UNSCREWED RODS @ 1800', LEFT IN HOLE. SHOT OFF TBG @ 1000', LEFT IN HOLE. PUMP 80 SX CMT & 200# HULLS @ 1000'. CIRCULATED CMT TO SURFACE. PRESSURED UP BACKSIDE TO 200#.

Perfs:

Top	Bot	Thru	Comments
2689	2696		
2642	2668		
2612	2632		
2590	2595		

INVOICED
DATE 2-3-09
INV. NO. 2009061148

RECEIVED
KANSAS CORPORATION COMMISSION


JAN 29 2009

CONSERVATION DIVISION
WICHITA, KS

Remarks: USED COMMON CEMENT BY SARGENTS.

Plugged through: TBG

District: 01

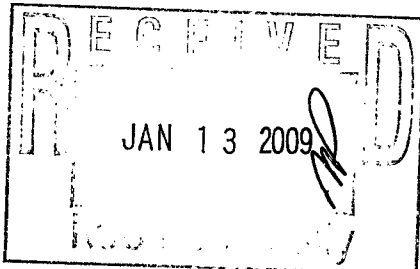

Signed

Jack MacLaskey
(TECHNICIAN)

PKT

[Signature]
FORM CP 2/3