

CARD MUST BE SIGNED

(see rules on reverse side)

✓ DA

Approx. NW SW SE Sec. 8 Twp. 10S S, Rg. 41 East
 x West
 731 Ft. from South Line of Section
 2046 Ft. from East Line of Section

Nearest lease or unit boundary line .731..... feet
County...Sherman.....
Lease Name...Alderman..... Well #...8-1.....

Ground surface elevationfeet MSL
Domestic well within 330 feet: —yes ^X —no
Municipal well within one mile: —yes ^X —no
Depth to bottom of fresh water, 300,
Depth to bottom of usable water 2500,
Surface pipe by Alternate: 1 — 2 ^X

Well Drilled For:		Well Class:	Type Equipment:
☒ Oil	☐ SWD	☐ Infield	☒ Mud Rotary
☐ Gas	☐ Inj	☐ Pool Ext.	☐ Air Rotary
☐ OWWO	☐ Expl	☒ Wildcat	☐ Cable

If OWWO: old well info as follows:

Operator
Well Name
Comp Date..... Old Total Depth.....

Surface pipe planned to be set	400'	
Conductor pipe required	None	
Projected Total Depth	5350'	feet
Formation	Miss.	

I certify that well will comply with K.S.A. 55-101, et seq., plus eventually plugging hole to KCC specifications.

Date ... 2-12-88..... Signature of Operator or Agent Jack E. Goss, Agent for Operator Title, Ass't. Drilling Manager

For KCC Use:

Conductor Pipe Required feet; Minimum Surface Pipe Required 400 feet per Alt. X (2)
This Authorization Expires 8-12-88 Approved By [Signature] 2-12-88


EFFECTIVE DATE: 2-17-88

Must be filed with the K.C.C. five (5) days prior to commencing well
This card void if drilling not started within six (6) months of date received by K.C.C.

Important procedures to follow:

1. Notify District office before setting surface casing.
2. Set surface casing by circulating cement to the top.
3. File completion forms ACO-1 with K.C.C. within 90 days of well completion, following instructions on ACO-1, side 1, and including copies of wireline logs.
4. Notify District office 48 hours prior to old well workover or re-entry.
5. Prior to filing Intent, prepare a proposed plugging plan in case well is D & A, then obtain approval of plan when calling district office prior to setting surface pipe.
6. Submit plugging report (CP-4) to K.C.C. after plugging is completed.
7. Obtain an approved injection docket number before disposing of salt water.
8. Notify K.C.C. within 10 days when injection commences or terminates.
9. If an alternate 2 completion, cement in the production pipe from below any usable water to surface within 120 days of spud date.

A Regular Section of Land 1 Mile = 5,280 Ft.

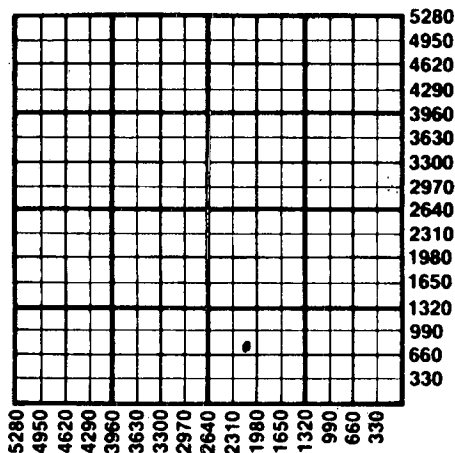

FEB 12 1988
02-12-1988
CONSERVATION DIVISION
Wichita, Kansas

State Corporation Commission of Kansas
Conservation Division
200 Colorado Derby Building
Wichita, Kansas 67202
(316) 263-3238