


15-05(-03693-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

Ellis County. Sec. 3 Twp. 11 Rge. (X) 17 (W)
Location as "NE/CNW/SW" or footage from lines. NE NE NE
Lease Owner The Derby Oil Company
Lease Name Simpson Well No. 1
Office Address 420 West Douglas, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed October 20 19 53
Application for plugging filed October 20 19 53
Application for plugging approved October 21 19 53
Plugging commenced October 29 19 53
Plugging completed October 31 19 53
Reason for abandonment of well or producing formation _____

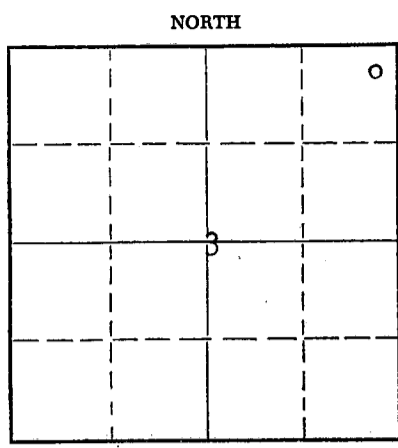

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	3668	3082'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with sand from 3620' to 3560' and ran 4 sacks of cement. Mudded hole to 196' set a 10' rock bridge and ran 15 sacks of cement at 186'. Mudded hole to 35' and ran 10 sacks of cement on top. Plugging completed.

RECORDED
STATE CORPORATION COMMISSION
11-12-1953
NOV 12 1953
CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor West Supply Company
Address Chase Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Bill K. Henrichs (employee of owner) or ~~(owner or operator)~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Bill K. Henrichs
Box 1030 Wichita Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 10th day of November, 19 53

My commission expires August 24, 1957
W. A. Wilson Notary Public.



PLUGGING
FILE SEC 3 T 11 R 176
BOOK PAGE 132 LINE 15

15-051-03693-00-00

DRILLER'S
LOG

Company: Derby Oil Company

NE/4 NE/4 NE/4
Sec. 3 Twn. 11S Rge. 17W

Farm: Simpson Well No. 1

Total Depth: 3670'

County: Ellis,
Kansas

Comm: 4-25-53 Comp: 5-6-53
Contractor: Peel Brothers, Inc.

Elevation:

Casing:

8 5/8" 165' Cem.
5 1/2" 3668' Cem.

, Production:

Figures below indicate botton of formation

Post Rock and Clay	0'	80
Shale		545
Sand		595
Shale		655
Sand		740
Pyrite		795
Shale		875
Sand		990
Shale and Red Bed		1125
Red Bed		1280
Anhydrite		1335
Red Bed and Shale		1490
Shale and Shells		2185
Shale, Lime and Shells		2285
Shale and Shells		2350
Lime and Shale		2500
Shale and Shells		2825
Lime and Shale		3180
Lime		3580
Lime Sand		3633
Lime		3663
Dolonite		3670
Total Depth		3670

RECEIVED
STATE COMMISSION
10-21-1953
OCT 21 1953
CONSERVATION DIVISION
Oklahoma, Kansas

This is to certify that the above information is to the best of my knowledge true and correct.

PEEL BROTHERS, INC.

BY R. E. Sutton

SUBSCRIBED AND SWORN to before me this 18th day of May 1953

Morris B. Welch
Notary Public Barton, Kansas

My commission expires January 9, 1957

PLUGGING
FILE SEC 3 T 11 R 17W
BOOK PAGE 137 LINE 15