


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

Ellis County, Sec. 3 Twp. 11 Rge. 17 (E) (W)

NORTH



Locate well correctly on above  
Section Plat

Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines  
Lease Owner H. E. Zoller  
Lease Name Simpson Well No. 1  
Office Address 814 Central Bldg., Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed August 3 19 51  
Application for plugging filed August 3 19 51  
Application for plugging approved August 3 19 51  
Plugging commenced August 3 19 51  
Plugging completed August 3 19 51  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation Depth to top Bottom Total Depth of Well Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Surface Casing		0	190 ft.	8-5/8"	190'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud from 3565 feet to 190 feet. Set wooden plug at 189 feet and filled with 15 sacks of cement. Plugged at 40' with 10 sacks of cement.

RECEIVED  
8-8-1951  
AUG 8 X 1951

Conservation Division  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Barnett Drlg., Inc.  
Address 623 First National Bank Bldg., Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
H. E. Zoller (employee of owner) or (owner or operator) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) H. E. Zoller


814 Central Bldg., Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 2nd day of August, 1951

Michael S. Lunden  
Notary Public.

My commission expires July 19, 1952

23-8390-s 8-51-20M

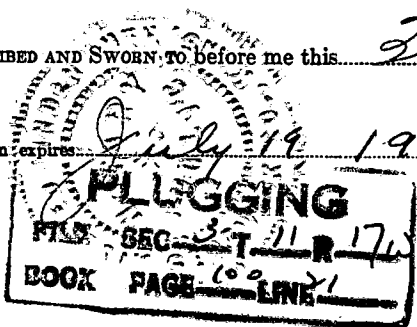

15-051-00648-00-00

H. E. ZOLLER-  
BARNETT DRILLING, INC., ET AL

LOG OF SIMPSON WELL NO. 1  
SW $\frac{1}{4}$  SW $\frac{1}{4}$  NW $\frac{1}{4}$  SECTION 3-11S-17W, ELLIS COUNTY, KANSAS

Date Commenced: July 20, 1951

Date Completed: August 2, 1951

<u>Formation</u>	<u>From</u>	<u>To</u>	<u>Remarks</u>
Surface Clay	0	25'	
Sand	25'	70'	
Shells	70'	130'	
Water Sand	130'	155'	
Shale and Shells	155'	190'	
			Set 8 5/8" Surface Pipe @ 190 feet; cemented with 150 sacks.
Shells	190'	320'	
Shale and Shells	320'	500'	
Sand	500'	540'	
Shale	540'	570'	
Shells	570'	650'	
Shale and Shells	650'	790'	
Sand	790'	950'	
Shale and Shells	950'	1,120'	
Anhydrite	1,120'	1,160'	
Shale and Shells	1,160'	1,380'	
Shale and Lime	1,380'	3,245'	
Lime	3,245'	3,325'	
Shale and Lime	3,325'	3,380'	
Lime	3,380'	3,568'	
		3,568'	Dry and abandoned.

Certificate

I, W. E. Cruce, of Barnett Drilling, Inc., hereby certify that to the best of my knowledge and belief, the above is a true and correct log of the Simpson Well No. 1, located in the SW $\frac{1}{4}$  SW $\frac{1}{4}$  NW $\frac{1}{4}$  of Section 3-11S-17W, Ellis County, Kansas.

W. E. Cruce

Subscribed and sworn to before me, in and for the County of Sedgwick, State of Kansas, this 8th day of August, 1951.

Adelaide Olivier  
Notary Public

My Commission Expires: May 12, 1955.



FILE REC. 3 121 R 20  
BOOK PAGE 109 LINE 21

RECEIVED  
STATE CORPORATION COMMISSION  
8-9-1951  
AUG 9 X 1951  
CONSERVATION DIVISION  
Wichita, Kansas