

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Ellis County. Sec. 20 Twp. 11 Rge. 20 (E) W (W)

Location as "NE/CNW&SW¼" or footage from lines SE SE NE

Lease Owner Anschutz Drilling Co., Inc.

Lease Name Thayer Well No. 1

Office Address 709 Union National Bank Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed September 17 1956

Application for plugging filed September 17 1956

Application for plugging approved September 17 1956


Plugging commenced September 17 1956

Plugging completed September 17 1956

Reason for abandonment of well or producing formation oil in commercial quantities not found

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

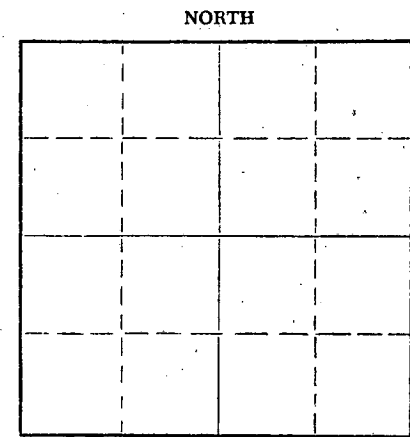

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3895' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	321	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with extra heavy rotary mud from total depth to 310'. Set bottom plug with 15 sacks cement, 1/2 sacks Hulls at 310'. Filled hole with extra heavy rotary mud. Set top plug at 40' cemented with 10 sacks cement, 1/2 sack Hulls.

RECEIVED
STATE CORPORATION COMMISSION
9-21-1956
SEP 21 1956

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Prime Drilling Company

Address 814-16 Union Center, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.

R. R. McNicol (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. R. McNicol
814-16 Union Center, Wichita, Kansas
(Address)

Subscribed and sworn to before me this 20th day of September, 1956



Darlene May
Notary Public.

PLUGGING
FILE SEC 20 T 11 R 20W
BOOK PAGE 100 LINE 31

15-051-00849-00-00

ROTARY DRILLING LOG

OPERATOR: Anschutz Drilling Co., Inc.
Thayer No. 1
SE SE NE Sec. 20-11-20W
Ellis County, Kansas

CONTRACTOR: Prime Drilling Company
COMM: 9/4/56
COMP: 9/17/56

Remarks: Set 8-5/8" surface casing at
321' cemented with 175 sacks Pozmix, 2%
C.C.

Formations:

Surface Clay	40'
Shale	100'
Sand Shale & Shells	225'
Shale	700'
Sand & Shale	780'
Shale & Shell	985'
Sand & Shale	1080'
Sand	1295'
Shale, Shells & Red Bed	1570'
Anhydrite	1615'
Shale & Shells	2100'
Lime & Shale	3280'
Lime	3710'
Lime & Shale	3790'
Cherty Lime & Shale	3865'
Arbuckle	3895'
Rotary Total Depth (D&A)	3895'

We certify the above log is true and
correct to the best of our knowledge
and belief.

PRIME DRILLING COMPANY

R.R. McNicol

R.R. McNicol

STATE OF KANSAS
COMMISSION
9-21-1956
REGISTRATION DIVISION
Topeka, Kansas

PLUGGING
FILE SEC 20 T 11 R 20W
BOOK PAGE 100 LINE 31