


STATE OF KANSAS
STATE CORPORATION COMMISSION

15-167-22095-00-00

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Russell County, Sec. 31 Twp. 11 Rge. 12 E/W
Location as "NE/CNW $\frac{1}{2}$ SW $\frac{1}{2}$ " or footage from lines

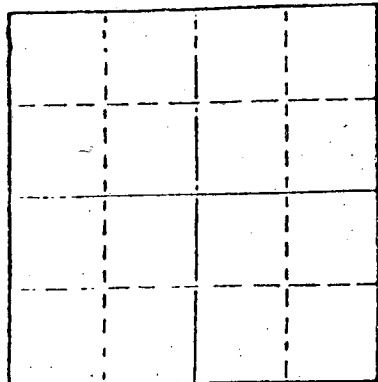

Locate well correctly on above
Section Plat

C NE NE
Lease Owner Shields Oil Producers, Inc.
Lease Name Strecker Well No. 6
Office Address Shields Bldg., Russell, Kansas 67665
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole
Date Well completed 4-9 1983
Application for plugging filed 4-9 1983
Application for plugging approved 4-9 1983
Plugging commenced 4-9 1983
Plugging completed 4-9 1983
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Scheck
Producing formation Depth to top Bottom Total Depth of Well 3,520
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	449'	Cmtd w/250 sak

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

- Fill hole w/heavy mud
- Push bridge plug to 690'
- Spotted 100 sax cement on plug thru 4 1/2" drill pipe
- Push bridge plug to 240'
- Spotted 40 sax cement on plug thru 4 1/2" drill pipe
- Push bridge plug to 40' w/1/2 sax hulls on plug
- Dump 10 sax cement on plug to cellar
- Dump 10 sax cement in mouse hole
- Dump 10 sax cement in rat hole

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Shields Drilling Co., Inc.

STATE OF Kansas COUNTY OF Russell, ss.
R. L. Shields (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


WICHITA, KANSAS

(Signature) R. L. Shields
Shields Bldg., Russell, Kansas 67665
(Address)

SUBSCRIBED AND SWORN TO before me this 18th day of April, 1983

Ruth Phillips
Notary Public.

My commission expires



RECEIVED
STATE CORPORATION COMMISSION
04-22-1983
APR 22 1983

CONSERVATION DIVISION
Wichita, Kansas