

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

GRAHAM

County. Sec. 26 Twp. 9 Rge. 23 (X) W (W)

Location as "NE/CNW/SW" or footage from lines C N LINE SE/4

Lease Owner DANE G HANSEN ESTATE

Lease Name HILL CITY HIGH SCHOOL Well No. 9

Office Address LOGAN, KANSAS

Character of Well (completed as Oil, Gas or Dry Hole) DRY HOLE

Date well completed MAY 20, 1966 19

Application for plugging filed MAY 20, 1966 19

Application for plugging approved MAY 20, 1966 19


Plugging commenced MAY 20, 1966 19

Plugging completed MAY 20, 1966 19

Reason for abandonment of well or producing formation TOO LOW STRUCTURALLY

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced?

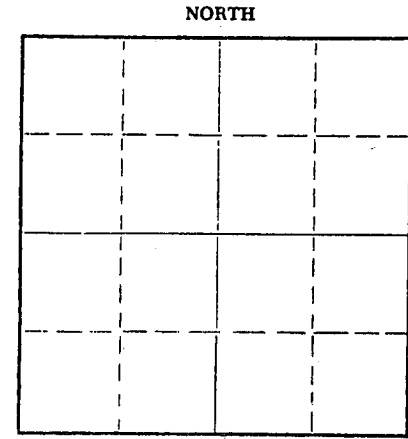

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well W. L. NICHOLS, MORELAND, KANSAS

Producing formation Depth to top Bottom Total Depth of Well 3940' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	193.47'	NONE

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

FILLED WITH HEAVY MUD TO 540'. SET PLUG. PUT IN 20 SACKS CEMENT. FILLED WITH HEAVY MUD TO 190'. SET PLUG. PUT IN 1/2 SACK HULLS AND 20 SACKS CEMENT. FILLED WITH HEAVY MUD UP TO 40'. SET PLUG. FILLED TO TOP WITH 10 SACKS CEMENT AND 1/2 SACK HULLS.

RECEIVED
STATE CORPORATION COMMISSION
5-26-66

MAY 26 1966

CONSERVATION DIVISION
WICHITA, KANSAS

Name of Plugging Contractor C-G DRILLING COMPANY (If additional description is necessary, use BACK of this sheet)
Address 107 RULE BUILDING, WICHITA 2, KANSAS

STATE OF KANSAS, COUNTY OF SEDGWICK, ss. G F GALLOWAY

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) G F GALLOWAY

107 RULE BUILDING (Address)

SUBSCRIBED AND SWORN TO before me this 23 day of MAY, 19 66

My commission expires 5/28/67

VICKY JACOBS Notary Public

WELL LOG

OPERATOR: DANE G HANSEN ESTATE

WELL NAME: HILL CITY HIGH SCHOOL LOCATION: C N LINE SE/4 26-9-23W

COUNTY: GRAHAM STATE: KANSAS

WELL COMMENCED: MAY 12, 1966 WELL COMPLETED: MAY 20, 1966

ELEVATION: 2418' KB TOTAL DEPTH: 3940'

PRODUCTION: DRY & ABANDONED RIG NO: 1

CASING - 8-5/8": 10 joints, 193.47' W/140 sacks cement.

5-1/2": _____

All Measurements taken from the top of rotary bushing.

FROM	TO	FORMATION	DEVIATION FROM VERTICAL	REMARKS:
0	750	SHALE	3/4° 1000'	
750	1050	shale & SAND	3/4° 1500'	
1050	1540	SHALE	3/4° 1615'	
1540	1770	SAND	3/4° 2000'	
1770	1940	SHALE & RED BED	3/4° 2600'	
1940	1992	RED BED	1/2° 3000'	
1992	2030	ANHYDRITE		DST #1 3733-3760
2030	2440	SHALE & SHELLS		DST #2 3786-3820
2440	3685	LIME & SHALE		DST #3 3855-3876
3685	3940	LIME		DST #4 3873-3896 DST #5 3893-3940

RECEIVED
STATE CORPORATION COMMISSION

JUN - 6 1966

CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
COUNTY OF SEDGWICK) SS:

The undersigned hereby certifies that to the best of his knowledge and belief, the above facts are true and correct.

C-G DRILLING CO.

By [Signature]

G F GALLOWAY

SUBSCRIBED AND SWORN TO, BEFORE ME, This 23 day of MAY, 1966

My comm. exp: May 20, 1967

[Signature]
Vicky Jacobs - Notary Public