

15-065-02184-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Graham County, Sec. 28 Twp. 9S Rge. 23 W (E) (W)

Location as "NE/CNW%SW%" or footage from lines NW NW SE

Lease Owner Imperial Oil of Kansas, Inc.

Lease Name Rice Estate "B" Well No. 1

Office Address Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed August 6, 1957

Application for plugging filed August 6, 1957

Application for plugging approved August 6, 1957


Plugging commenced August 6, 1957

Plugging completed August 6, 1957

Reason for abandonment of well or producing formation No commercial quantities of oil found.

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

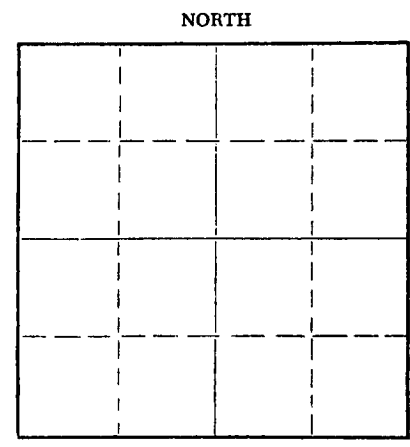

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Hays, Kansas

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3965 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	7-27-57	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plugged hole with 20 sacks cement at 600 feet, set No. 1 plug at 200' with 15 sacks cement, set No. 2 plug at 40 feet with 10 sacks cement.

9-5-57

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Imperial Oil of Kansas, Inc.

Address 780 Fourth National Building, Wichita 2, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss. Raymond L. Bacon (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me, God.

(Signature) Raymond L. Bacon  
780 Fourth National Building, Wichita, Ks.  
(Address)

SUBSCRIBED AND SWORN TO before me this 4th day of September, 19 57

Louetta M. Duncan  
Louetta M. Duncan Notary Public.

My commission expires December 19, 1960

PLUGGING  
FILE SEC. 28 T. 9 R. 23W  
BOOK PAGE 35 LINE 18

DRILLER'S LOG

Imperial Oil of Kansas, Inc.  
780 Fourth National Building  
Wichita 2, Kansas

Rice Estate "B" No. 1  
NW NW SE Sec. 28-9S-23W  
Graham County, Kansas

Total Depth: 3965'

Commenced: 7-27-57 Completed: 8-6-57

Elevation: 2410' RB  
Production: D & A

Contractor: Imperial Oil of Kansas, Inc.  
Wichita, Kansas

Casing Record: Set 8-5/8" Surface Pipe at 219' with 175 sacks cement.

Figures indicate bottom of formations:

Sand	135'			
Shale & Shells	715'			
Sand & Shale	1530'	Anhydrite	2000'	(-410)
Sand	1740'	Heebner	3697'	(-1287)
Shale	1875'	Toronto	3722'	(-1312)
Shale & Red Bed	2000'	Lansing	3734'	(-1324)
Anhydrite	2040'	Total Depth	3965'	(-1555)
Shale & Shells	2510'			
Shale & Lime	3700'			
Lime	3965'			
Total Depth	3965'			

We hereby certify this to be a correct and accurate log of the above described well as shown on the daily drilling reports.

IMPERIAL OIL OF KANSAS, INC.

By: Ray D. Bacon  
Vice President



Subscribed and sworn to before me this 4th day of September, 1957.

My Commission Expires:

December 19, 1960

RECEIVED  
REGISTRATION COMMISSION

Luella M. Anderson  
Notary Public

SEP 5 1957  
REGISTRATION DIVISION

PLUGGING  
FILE SEC. 28 T. 9 R. 23W  
BOOK PAGE 35 LINE 10